

KERR=McGEE 88-6 *Nav.* 722
NW SE 25-36N-29E APACHE CO.

WELL COMPLETION OR RECOMPLETION REPORT AND WELL LOG

DESIGNATE TYPE OF COMPLETION:

New Well Work-Over Deepen Plug Back Same Reservoir Different Reservoir Oil Gas Dry

DESCRIPTION OF WELL AND LEASE

Operator: **Kerr-McGee Corporation** Address: **P.O. Box 250, Amarillo, Texas 79100**
 Federal, State or Indian Lease Number or name of lessor if fee lease: **Navajo 88 #14-20-0603-8812** Well Number: **6** Field & Reservoir: **Dineh-Bi-Keyah**
 Location: **2000' FSL & 1690' FEL (NW/4, SE/4)** County: **Apache**
 Sec. TWP-Range or Block & Survey: **Sec. 25, T-36-N, R-29-E**

Date spudded: **8/09/81** Date total depth reached: **8/24/81** Date completed, ready to produce: **9/17/81** Elevation (DF, RKB, RT or Gr.): **8591 RKB** feet Elevation of casing hd. flange: **8579** feet
 Total depth: **4439'** P.B.T.D.: **4333'** Single, dual or triple completion?: **Single**
 Producing interval (s) for this completion: **4052' - 4114'** Rotary tools used (interval): **All** Cable tools used (interval): **None**
 Was this well directionally drilled?: **No** Was directional survey made?: **No** Was copy of directional survey filed?: **No** Date filed: **Sept. 2, 1981**
 Type of electrical or other logs run (check logs filed with the commission): **GR-CCL-CBL; GR-CFDL (all filed)** Date filed: **Sept. 2, 1981**

CASING RECORD

Purpose	Size hole drilled	Size casing set	Weight (lb./ft.)	Depth set	Sacks cement	Amt. pulled
Surface	12 1/4"	8 5/8"	24#/ft	415'	365 sx	0
Production	7 7/8"	5 1/2"	15.5#/ft	4439'	250 sx	0

TUBING RECORD

LINER RECORD

Size	Depth set	Packer set at	Size	Top	Bottom	Sacks cement	Screen (ft.)
2 7/8 in.	4213 ft.	None					

Number per ft.	Size & type	Depth Interval	Amt't. & kind of material used	Depth Interval
2	22.5 gr Jumbo Jet II	4052' - 4114'	36,592 gal treated crude + 30M# 10/20 sd	4052' - 4114'

INITIAL PRODUCTION

Date of first production: **9/19/81** Producing method (Indicate if flowing, gas lift or pumping--if pumping, show size & type of pump.): **pumping 2 1/2" x 2" x 16' top hold down; 74" SL & 9 PM**
 Date of test: **10/9/81** Hrs. tested: **24** Choke size: **None** Oil prod. during test: **170** bbls. Gas prod. during test: **200** MCF Water prod. during test: **0** bbls. Oil gravity: **39.4** API (Corr)
 Tubing pressure: **0** Casing pressure: **25** psi Cal'd rate of Production per 24 hrs.: **170** bbls. Oil Gas Water Gas-oil ratio: **1.18:1**

Disposition of gas (state whether vented, used for fuel or sold):
vented

CERTIFICATE: I, the undersigned, under the penalty of perjury, state that I am the **Sr. Engineering Assistant** of the **Kerr-McGee Corporation** (company), and that I am authorized by said company to make this report; and that this report was prepared under my supervision and direction and that the facts stated therein are true, correct and complete to the best of my knowledge.

October 14, 1981
Date

Kelley Eisenberg
Signature
Kelley Eisenberg

Permit No. 722

STATE OF ARIZONA
 OIL & GAS CONSERVATION COMMISSION
 Well Completion or Recompletion Report and Well Log
 Form No. 4 File One Copy

DETAIL OF FORMATIONS PENETRATED

Formation	Top	Bottom	Description*
Coconino	1683'	2424'	Igneous Plutonic Syenite
Cutler	2424'	3529'	
Hermosa	3529'	4004'	
Black Shale	4004'	4050'	
Sill	4050'	4115'	
Base of Sill	4115'	4244'	
Mississippian	4244'	TD	

* Show all important zones of porosity, detail of all cores, and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries.

INSTRUCTIONS:

Attach drillers log or other acceptable log of well.

This Well Completion or Recompletion report and well log shall be filed with the State of Arizona Oil & Gas Conservation Commission not later than thirty days after project completion.

Form No. 4

**OPERATOR'S CERTIFICATE OF COMPLIANCE AND AUTHORIZATION
TO TRANSPORT OIL OR GAS FROM LEASE**

Federal, State or Indian Lease Number, or lessor's name if fee lease <u>14-20-0603-8812</u>	Field <u>Dineh-BI-Keyah</u>	Reservoir <u>Hermosa</u>
Survey or Sec-Twp-Rge <u>Sec 25, 26, 35, 36 T36N-R-99E</u>	County <u>Apache</u>	State <u>AZ</u>
Operator <u>Mountain States Petroleum Corp.</u>		
ADDRESS ALL CORRESPONDENCE CONCERNING THIS FORM TO:		
Street <u>P O Bx 1936</u>	City <u>Roswell,</u>	State <u>New Mexico 88202</u>
Above named operator authorizes (name of transporter) <u>Giant Industries</u>		
Transporter's street address <u>P O Bx 12999</u>	City <u>Scottsdale,</u>	State <u>AZ</u>
Field address <u>P O Bx 256 (Bloomfield Hwy) Farmington, N M 87499</u>		
Oil, condensate, gas well gas, casinghead gas		
To transport	<u>100%</u> of the	<u>oil</u> from said lease.
OTHER GATHERERS TRANSPORTING FROM THIS LEASE ARE AS FOLLOWS:		
Name of gatherer	% transported	Product transported
Indicate whether or not this certificate is for a new lease. If not a new lease, indicate whether or not it is a change of operator, change of lease name, change of gatherer, or a consolidation or subdivision of leases and give effective date of change. <u>Change of Oper.</u>		

The undersigned certifies that the rules and regulations of the State of Arizona Oil & Gas Conservation Commission have been complied with in drilling and producing operations on this lease, except as noted above, and that the above transporter is authorized to transport the above specified percentage of the allowable oil or gas produced from the above described property, and that this authorization will be valid until further notice or until cancelled by the State of Arizona Oil & Gas Conservation Commission.

CERTIFICATE: I, the undersigned, under the penalty of perjury, state that I am the Secretary of the Mountain States Petro. Corp. (company), and that I am authorized by said company to make this report; and that this report was prepared under my supervision and direction and that the facts stated therein are true, correct and complete to the best of my knowledge.

Date Aug. 11, 1995 Signature *Ruby Wickersham*

Date approved: AUG 16 1995

STATE OF ARIZONA
OIL & GAS CONSERVATION COMMISSION

By: *Steven L. Rainey*

Permit No. 722

STATE OF ARIZONA
OIL & GAS CONSERVATION COMMISSION
Operator's Certificate of Compliance & Authorization to
Transport Oil or Gas from Lease
File Two Copies
Form No. 8

**OPERATOR'S CERTIFICATE OF COMPLIANCE AND AUTHORIZATION
TO TRANSPORT OIL OR GAS FROM LEASE**

Federal, State or Indian Lease Number, or lessor's name if fee lease 14-20-0603-8812 Navajo 88	Field Dineh-Bi-Keyah	Reservoir Hermosa
Survey or Sec-Twp-Rge S 25 - T 36 N - R 30 E	County Apache	State Arizona
Operator Kerr-McGee Corporation		
ADDRESS ALL CORRESPONDENCE CONCERNING THIS FORM TO:		
Street P. O. Box 250	City Amarillo	State Texas, 79189
Above named operator authorizes (name of transporter) Gary-Williams Energy		
Transporter's street address 370 17th St., Suite 5300	City Denver	State Colorado, 80202
Field address P. O. Box 159, Bloomfield, NM 87413		
Oil, condensate, gas well gas, casinghead gas		
To transport	100 % of the Oil	from said lease.
OTHER GATHERERS TRANSPORTING FROM THIS LEASE ARE AS FOLLOWS:		
Name of gatherer	% transported	Product transported
Indicate whether or not this certificate is for a new lease. If not a new lease, indicate whether or not it is a change of operator, change of lease name, change of gatherer, or a consolidation or subdivision of leases and give effective date of change.		

The undersigned certifies that the rules and regulations of the State of Arizona Oil & Gas Conservation Commission have been complied with in drilling and producing operations on this lease, except as noted above, and that the above transporter is authorized to transport the above specified percentage of the allowable oil or gas produced from the above described property, and that this authorization will be valid until further notice or until cancelled by the State of Arizona Oil & Gas Conservation Commission.

CERTIFICATE: I, the undersigned, under the penalty of perjury, state that I am the Area Manager of the Kerr-McGee Corporation (company), and that I am authorized by said company to make this report; and that this report was prepared under my supervision and direction and that the facts stated therein are true, correct and complete to the best of my knowledge.

8/18/92 Date H. H. Rice Signature H. H. Rice


Date approved: 8-21-92

STATE OF ARIZONA
OIL & GAS CONSERVATION COMMISSION
By: Steven L. Rainz

Permit No. _____

STATE OF ARIZONA
OIL & GAS CONSERVATION COMMISSION
Operator's Certificate of Compliance & Authorization to
Transport Oil or Gas from Lease
File Two Copies
Form No. 8

T
36
N

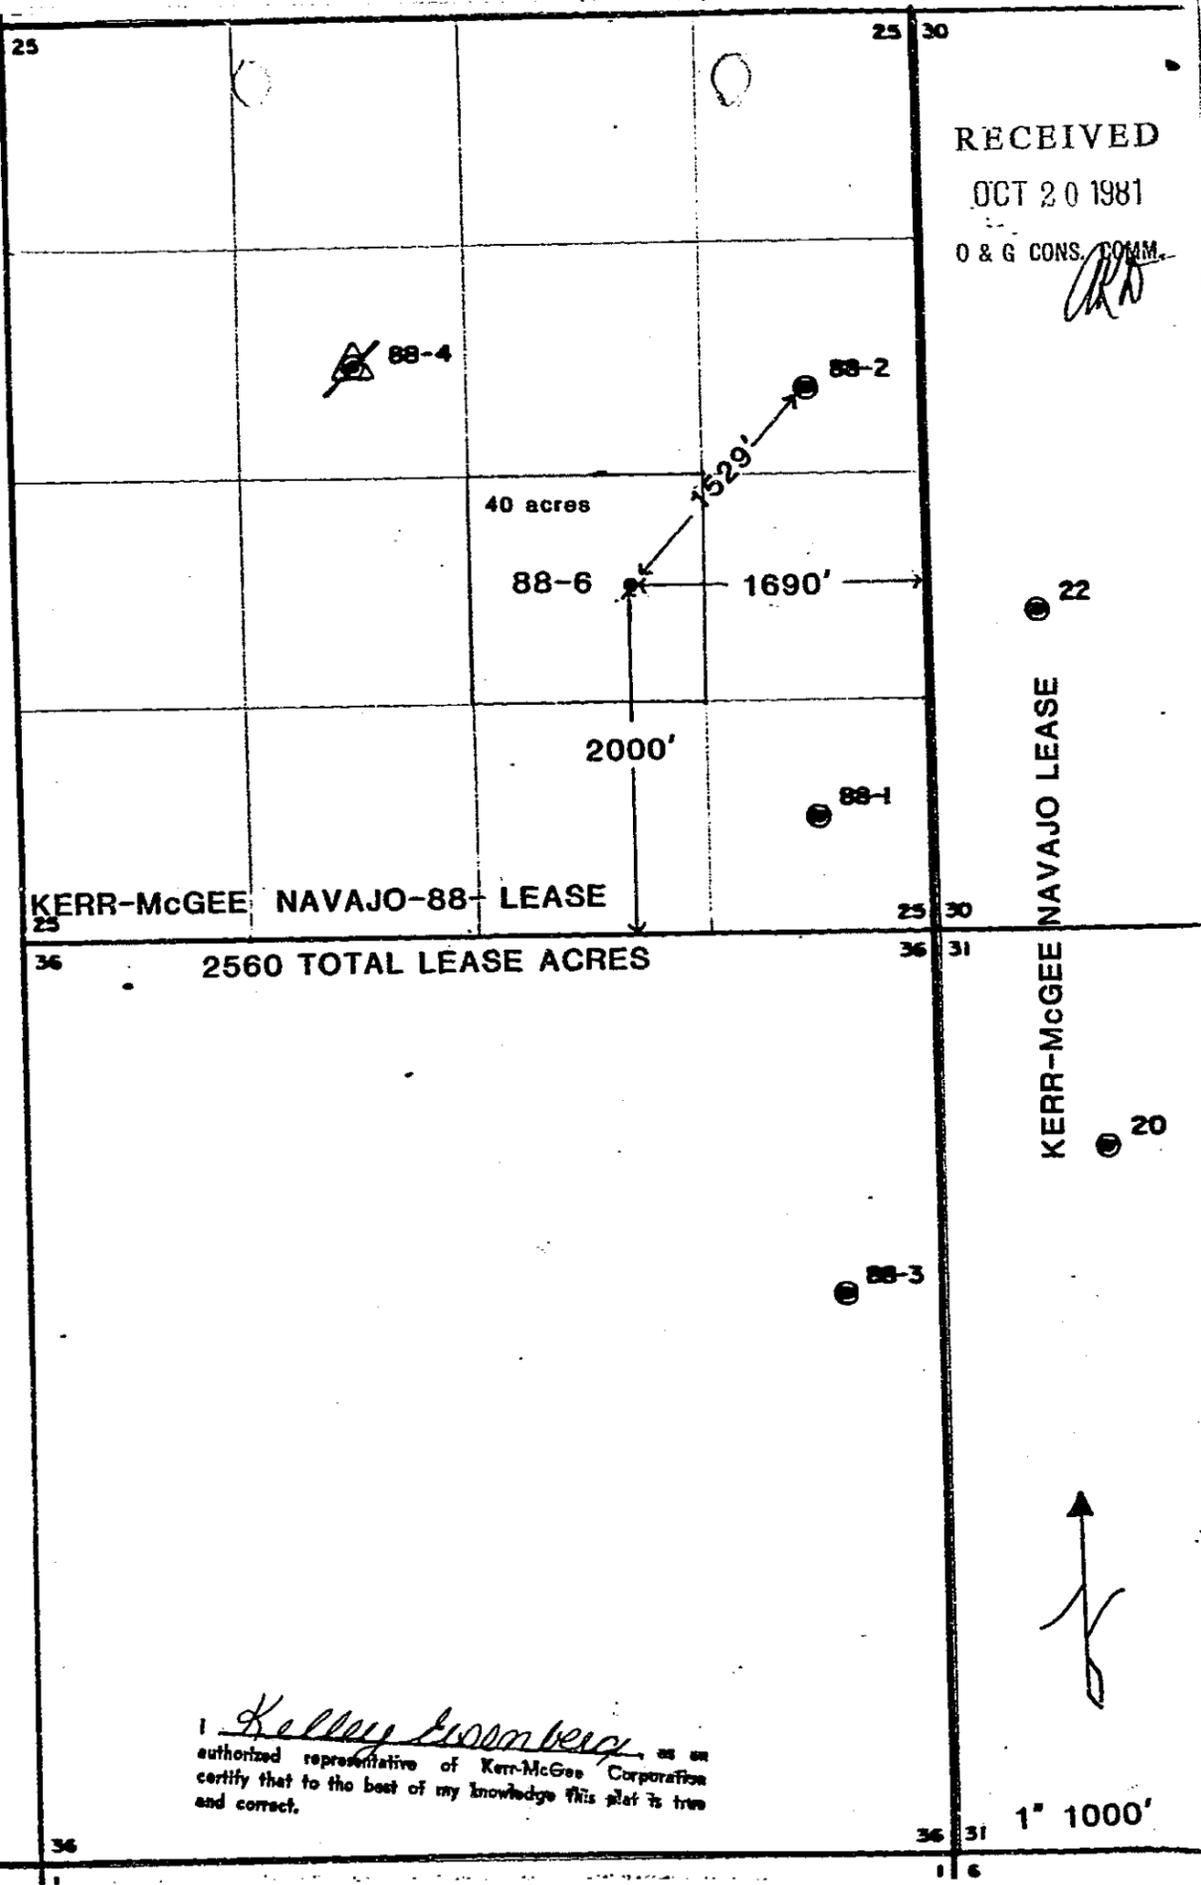

RECEIVED
OCT 20 1981
O & G CONS. COMM.
[Signature]

KERR-McGEE NAVAJO-88 LEASE

2560 TOTAL LEASE ACRES

KERR-McGEE NAVAJO LEASE

Kelly Swenberg
authorized representative of Kerr-McGee Corporation
certify that to the best of my knowledge this plat is true
and correct.

1" = 1000'

POTENTIAL TEST AND REQUEST FOR ALLOWABLE - () WELLS

DESIGNATE TYPE OF COMPLETION:

New Well Work-over Deepen Plug Back Same Reservoir Different Reservoir

Other Reason For Filing:

RECEIVED

Operator **Kerr-McGee Corporation** OCT 20 1981
 Address **P.O. Box 250, Amarillo, Texas 79189** O & G CONS. COMM.

DESCRIPTION OF WELL AND LEASE

Federal, State or Indian Lease Number, or Lessor's Name if Fee Lease Navajo 88 #14-20-0603-8812	Well Name Navajo #88-6	County Apache
Footage Location 2000' FSL & 1690' FEL (NW/4, SE/4)		
Sec. Twp. Rge. Sec. 25, T-36-N, R-29-E		
Date spudded 8/09/81	Date completed, ready to produce 9/17/81	Total depth 4439' RKB
Field and reservoir Dineh-Bi-Keyah	Top of pay 4050' RKB	P.B.T.D. 4333' RKB
Producing interval 4052' - 4114'		

TEST DATA

Date of first production 9/19/81	Date of test 10/9/81	Length of test 24 hrs.	Producing method (flow pump, gas lift) Pumping	Amount of load oil injected if any 36,592 gal
Number of barrels of oil produced from completion or recompletion date to test date 1452 bbls after load		If well is produced by pumping, give pump size, length of stroke and strokes per minute. 74" SL @ 9 SPM 2 1/2"x2"x16' top hold down		
Tubing pressure 0	Casing pressure 25 psi	Choke size None		
*Actual production during test:	Oil (bbls) 170	Water (bbls) 0	Gas (MCF) 200	

*Production must actually equal or exceed wells daily allowable or test must be for full 24 hours

Gas-oil ratio 1.176:1	MCF/bbl.	Oil gravity 39.4 * A.P.I. corrected	Name of transporter of oil Kerr-McGee Corporation
Number of acres attributed to this well 40	Number of producing wells in this reservoir on this lease, including this well 4	Single, dual or triple completion? Single	Daily allowable requested (bbls) 170 bbls

Plat showing acreage attached—plat should show leases, offset wells, distance from this well to the nearest well on the same lease completed in or drilling to the same reservoir, and the boundaries of drilling and producing, or proration, units attributed to this well and other wells on the same lease completed in or drilling to the same reservoir, the number of acres in each unit and the number of acres in the lease.

CERTIFICATE: I, the undersigned, under the penalty of perjury, state that I am the Sr. Engineering Assistant of the Kerr-McGee Corporation (company), and that I am authorized by said company to make this report; and that this report was prepared under my supervision and direction and that the facts stated therein are true, correct and complete to the best of my knowledge.

Date October 14, 1981

Signature Kelley Eisenberg

Witnessed by: _____
 Organization _____
 Signature _____
 Date _____

Permit No. 722

Form No. 6

STATE OF ARIZONA
 OIL & GAS CONSERVATION COMMISSION

Potential Test & Request for Allowable—Oil Wells

File One Copy

RECEIVED

OCT 13 1981

AKS

Form 9-331
Dec. 1973

O & G CONS. COMM.

Form Approved
Budget Bureau No. 42-R1424

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well gas well other

2. NAME OF OPERATOR
Kerr-McGee Corporation

3. ADDRESS OF OPERATOR
P.O. Box 250, Amarillo, Texas 79189

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 2000' FSL & 1690' FEL (NW/4/SE/4)
AT TOP PROD. INTERVAL: 2000' FSL & 1690' FEL
AT TOTAL DEPTH: 2000' FSL & 1690' FEL

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:		SUBSEQUENT REPORT OF:	
TEST WATER SHUT-OFF	<input type="checkbox"/>		<input type="checkbox"/>
FRACTURE TREAT	<input type="checkbox"/>		<input type="checkbox"/>
SHOOT OR ACIDIZE	<input type="checkbox"/>		<input type="checkbox"/>
REPAIR WELL	<input type="checkbox"/>		<input type="checkbox"/>
PULL OR ALTER CASING	<input type="checkbox"/>		<input type="checkbox"/>
MULTIPLE COMPLETE	<input type="checkbox"/>		<input type="checkbox"/>
CHANGE ZONES	<input type="checkbox"/>		<input type="checkbox"/>
ABANDON*	<input type="checkbox"/>		<input type="checkbox"/>
(other) weekly drilling & completion report			

5. LEASE
Navajo 88 #14-20-0603-8812

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
Navajo

7. UNIT AGREEMENT NAME
N/A

8. FARM OR LEASE NAME
Navajo

9. WELL NO.
6

10. FIELD OR WILDCAT NAME
Dineh-Bi-Keyah

11. SEC., T., R., M.; OR BLK. AND SURVEY OR AREA
Sec. 25, T-36-N-R-29-#

12. COUNTY OR PARISH | 13. STATE
Apache | Arizona

14. API NO.
02-001-20252

15. ELEVATIONS (SHOW DF, KDB, AND WD)
GL 8579'; OF 8589'; RKB 8591'

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

10-1-81 -- Repairing line restriction

10-7-81

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Kelley Eisenberg TITLE Sr. Eng. Asst. DATE October 9, 1981
Kelley Eisenberg

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

722

RECEIVED
OCT 5 1981

AKS

Form 9-331
Dec. 1973

Form Approved.
Budget Bureau No. 42-R1424

UNITED STATES O & G CONS. COMM.
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS
(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well gas well other
2. NAME OF OPERATOR
Kerr-McGee Corporation
3. ADDRESS OF OPERATOR
P.O. Box 250, Amarillo, Texas 79189
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 2000' FSL & 1690' FEL (NW/4/SE/4)
AT TOP PROD. INTERVAL: 2000' FSL & 1690' FEL
AT TOTAL DEPTH: 2000' FSL & 1690' FEL

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO: SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF
FRACTURE TREAT
SHOOT OR ACIDIZE
REPAIR WELL
PULL OR ALTER CASING
MULTIPLE COMPLETE
CHANGE ZONES
ABANDON*
(other) weekly drilling & completion report

5. LEASE
Navajo 88 #14-20-0603-8812
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
Navajo
7. UNIT AGREEMENT NAME
N/A
8. FARM OR LEASE NAME
Navajo-88
9. WELL NO.
6
10. FIELD OR WILDCAT NAME
Dineh-Bi-Keyah
11. SEC., T., R., M.; OR BLK. AND SURVEY OR AREA
Sec. 25, T-36-N-R-29-#
12. COUNTY OR PARISH | 13. STATE
Apache | Arizona
14. API NO.
02-001-20252
15. ELEVATIONS (SHOW DF, KDB, AND WD)
GL 8579'; OF 8589'; RKB 8591'

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

9-24-81-9-28-81 Fixing pipeline
9-29-81 Brought on line @ 3:pm. Ran 4 hr. test calc 24 hr. prod @ 234 BOPD & 0 BWP, 384 BLO to recover.
9-30-81 Pmp 14 hrs. 181 BO, 0 BW, 205 BOLR. Shut well in due to HLP. Line pres. 300 psi.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Kelley Eisenberg TITLE St. Eng. Asst. DATE October 1, 1981
Kelley Eisenberg
(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL IF ANY:

722

RECEIVED

SEP 28 1981

AKT

Form 9-331
Dec. 1973

Form Approved.
Budget Bureau No. 42-R1424

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

O & G CONS. COMM

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well gas well other

2. NAME OF OPERATOR
Kerr-McGee Corporation

3. ADDRESS OF OPERATOR
P.O. Box 250, Amarillo, Texas 79189

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 2000' FSL & 1690' FEL (NW/4/SE/4)
AT TOP PROD. INTERVAL: 2000' FSL & 1690' FEL
AT TOTAL DEPTH: 2000' FSL & 1690' FEL

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:	SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF <input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	<input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	<input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE <input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES <input type="checkbox"/>	<input type="checkbox"/>
ABANDON* <input type="checkbox"/>	<input type="checkbox"/>

(other) weekly drilling & completion report

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

- 9-17-81 Hook up to electricity
- 9-18-81 Put well on pump @ 9 SPM & 74" SL. Test for 4 hrs. SI to test flowline.
- 9-19-81 Test 3 hrs. 32 BO + 0 BW; 852 BOLR
- 9-20-81 SI to fix leak in flowline
- 9-21-81 Repairing leak
- 9-22-81 Bring well on line & put on test
- 9-23-81 Well prod. for 1 hr. 9 BO + 0 BW. Well quit pumping. Lowered pump. Well would not pump up.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Kelley Eisenberg TITLE Sr. Eng. Asst. DATE 9-25-81

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

722

RECEIVED

SEP 24 1981

Form 9-331
Dec. 1973

Form Approved
Budget Bureau No. 42-R1424

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

O & G CONS. COMM. LEASE

SUNDRY NOTICES AND REPORTS ON WELLS
(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well gas well other

2. NAME OF OPERATOR
Kerr-McGee Corporation

3. ADDRESS OF OPERATOR
P.O. Box 250, Amarillo, Texas 79189

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 2000' FSL & 1690' FEL (NW/4/SE/4)
AT TOP PROD. INTERVAL: 2000' FSL & 1690' FEL
AT TOTAL DEPTH: 2000' FSL & 1690' FEL

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

Navajo 88 #14-20-0603-8812

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
Navajo

7. UNIT AGREEMENT NAME
N/A

8. FARM OR LEASE NAME
Navajo 88

9. WELL NO.
6

10. FIELD OR WILDCAT NAME
Dineh-Bi-Keyah

11. SEC., T., R., M.; OR BLK. AND SURVEY OR AREA
Sec. 25, T-36-N-R-29-#

12. COUNTY OR PARISH | 13. STATE
Apache | Arizona

14. API NO.
02-001-20252

15. ELEVATIONS (SHOW DF, KDB, AND WD)
GL 8579'; OF 8589'; RKB 8591'

REQUEST FOR APPROVAL TO:	SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF <input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	<input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	<input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE <input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES <input type="checkbox"/>	<input type="checkbox"/>
ABANDON* <input type="checkbox"/>	<input type="checkbox"/>

(other) weekly drilling & completion report

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

- 9-10-81 TIH w/ bailer, 138 Jts. 2 7/8" tbg. TO Sd @ 4154. Cleaned out to 4293'
- 9-11-81 RU to swab
- 9-12-81 Swabbed 113 bbls.; 996 BLO to recover. Set pres. bomb
- 9-13-81 TOH w/bomb. SD over weekend
- 9-14-81 Recover pres. bomb from 4083; 520 psi. TIH w/ tbg., & SN to 4182' RKB. TIH w/ pump & rods.
- 9-15-81 Finish TIH w/ rods. Put well on @ 74" SL.
- 9-16-81 Set econopac motor. Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Kelley Eisenberg TITLE Sr. Eng. Asst. DATE September 22, 1981
Kelley Eisenberg
(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL IF ANY:

722

Form 9-331
Dec. 1973

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well gas well other

2. NAME OF OPERATOR
Kerr-McGee Corporation

3. ADDRESS OF OPERATOR
P.O. Box 250, Amarillo, Texas 79189

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 2000' FSL & 1690' FEL (NW/4/SE/4)
AT TOP PROD. INTERVAL: 2000' FSL & 1690' FEL
AT TOTAL DEPTH: 2000' FSL & 1690' FEL

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:	SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF <input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	<input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	<input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE <input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES <input type="checkbox"/>	<input type="checkbox"/>
ABANDON* <input type="checkbox"/>	<input type="checkbox"/>

(other) weekly drilling & completion report

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

9/3/81 RU Dresser Atlas. Perf from 4052' to 4114' (Hermosa Sill) w/ 2 SPF Jumbo Jet II 22.5 gram. Total 125 holes. RD Dresser.

9/4/81 MI & RU Halliburton to frac.

9/5/81 Loaded hole w/ 4792 gal treated lease crude. Frac dwn csg as follows:
 Pump 10,000 gal My-T-Oil II w/ 1 ppg 10/20 sd @ 46 BPM & 680 PSI.
 Pump 10,000 gal My-T-Oil II w/ 2 ppg 10/20 sd @ 48 BPM & 690-740 PSI.
 Pump 10,000 gal My-T-Oil II w/ 3 ppg 10/20 sd @ 48 BPM & 690-490 PSI.
 Displace w/ 1800 gal treated crude @ 48 BPM & 640-510 PSI. ISIP 300 psi.
 Max rate 49 BPM & avg rate 48 BPM. Max press 950 PSI & avg press 690 PSI.
 RD Hall., RU Dresser Atlas, ran temp survey. 1109 bbl to rec.

9/6/81 No work.

9/7/81 No work.

9/8/81 Bail; rec frac sd.

9/9/81 Top of sd 4093. Bail sd.
 Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Kelley Eisenberg TITLE St. Eng. Asst. DATE September 14, 1981

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

Form Approved.
Budget Bureau No. 42-R1424

5. LEASE
Navajo 88 714-20-0603-8812

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
Navajo

7. UNIT AGREEMENT NAME
N/A

8. FARM OR LEASE NAME
Navajo 88

9. WELL NO.
6

10. FIELD OR WILDCAT NAME
Dineh-Bi-Keyah

11. SEC., T., R., M. OR BLK. AND SURVEY OR AREA
Sec. 25, T-36-N-R-29-#

12. COUNTY OR PARISH
Apache

13. STATE
Arizona

14. API NO.
02-001-20252

15. ELEVATIONS (SHOW DF, KDB, AND WD)
GL 8579'; TF 8589'; RKB 8591'

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

722

AKS

RECEIVED
SEP 18 1981
D & G CONS. COMM.

RECEIVED

SEP 8 1981

Form 9-331
Dec. 1973

Form Approved.
Budget Bureau No. 42-R1424

UNITED STATES
DEPARTMENT OF THE INTERIOR O & G CONS.
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well gas well other

2. NAME OF OPERATOR
Kerr-McGee Corporation

3. ADDRESS OF OPERATOR
P.O. Box 250 Amarillo, Texas 79189

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 2000' FSL & 1690' FEL (NW/4 SE/4)
AT TOP PROD. INTERVAL: 2000' FSL & 1690' FEL
AT TOTAL DEPTH: 2000' FSL & 1690' FEL

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:	SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF <input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	<input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	<input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE <input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES <input type="checkbox"/>	<input type="checkbox"/>
ABANDON* <input type="checkbox"/>	<input type="checkbox"/>
(other) <u>Completion</u> <input type="checkbox"/>	<input type="checkbox"/>

5. LEASE # Navajo 88

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
Navajo

7. UNIT AGREEMENT NAME
None

8. FARM OR LEASE NAME
Navajo 88

9. WELL NO.
6

10. FIELD OR WILDCAT NAME
Dineh-Bi-Keyah

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 25, T36N, R29E

12. COUNTY OR PARISH | 13. STATE
Apache | Arizona

14. API NO.
02-001-20252

15. ELEVATIONS (SHOW DF, KDB, AND WD)
G.L. 8579', DF 8589', R.K.B. 8591'

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

- 8-27-81 W O procedure
- 8-28-81 S D over weekend
- 8-29-81 W O procedure
- 8-30-81 W O procedure
- 8-31-81 Welding on csg nipple & install BOP. MI Farmington Well Service. RU double drum completion unit.
- 9-01-81 Weld 5 1/2" bell nipple on csg; Install 900 series double BOP, RU Dresser Atlas; Ran GR-CBL-CCL from 4336' RKB PBD to 2650'. Perf from 4052' to 4114' RKB. RD Dresser Atlas. MI & set 3 - 500 bbl frac tanks.
- 9-02-81 RU pump truck. Pres test csg to 3000' psi. Held ok for 15 min. Swab. RU Dresser Atlas to perf.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Kelley Eisenberg TITLE Sr. Eng. Asst. DATE September 4, 1981

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

722

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well gas well other

2. NAME OF OPERATOR
Kerr-McGee Corporation

3. ADDRESS OF OPERATOR
P.O. Box 250 Amarillo, Texas 79189

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 2000' FSL & 1690' FEL (NW/4 SE/4)
AT TOP PROD. INTERVAL: 2000' FSL & 1690' FEL
AT TOTAL DEPTH: 2000' FSL & 1690' FEL

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:	SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF <input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	<input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	<input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE <input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES <input type="checkbox"/>	<input type="checkbox"/>
ABANDON* <input type="checkbox"/>	<input type="checkbox"/>
(other) <u>Well Status Report</u>	

5. LEASE
Navajo 88 #14-20-0603-8812

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
Navajo

7. UNIT AGREEMENT NAME
None

8. FARM OR LEASE NAME
Navajo 88

9. WELL NO.
6

10. FIELD OR WILDCAT NAME
Dineh-Bi-Keyah

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 25, T36N, R29E

12. COUNTY OR PARISH
Apache

13. STATE
Arizona

14. API NO.
02-001-29252

15. ELEVATIONS (SHOW DF, KDB, AND WD)
G.L. 8579', DF 8589', R.K.B. 8591'

RECEIVED
SEP 15 1981
O & G CONS. COMM.

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

- 8-20-81 Drld from 3575' to 3710', Form Sd & Sh, Drld 135', Mud wt 9.0, Bit #6
STC 7 8/8", F-2, in @ 3700'
- 8-21-81 Drld from 3710' to 3925', Form Sd & SH, Drld 215', Mud wt 9.1
- 8-22-81 Drld from 3925' to 4210', Form Sd & Sh, Drld 285', Mud wt 9.2
- 8-23-81 Drld 4210' to 4391', Form Sh & Intru, Drld 181', Mud wt 9.3
- 8-24-81 Drld 4391' to 4439', Form Sh, Drld 48', Mud wt 9.2
Circ. for logs. RU Schlum. Logger's TD 4431'. TOH & LD. DP, RU csg tools & ran 109 jts 5 1/2", 15.5#, K-55, ST&C csg Shoe @ 4439'. IFV @ 4296' - measured. Ran sand blasted pipe from 4129' to 4029'. Cmt w/500 gal mud flush followed by 250 sx cl. "H" cmt w/1/4# flocele PS mixed to 15.5 PPG. Good circ. throughout job. ND BOP's & set csg slips.
- 8-25-81 Set slips & cut off csg. Release Rig @ 9 AM 8-25-81
- 8-26-81 MORT

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Kelley Eisenberg TITLE Sr. Eng. Asst. DATE August 28, 1981
Kelley Eisenberg

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL IF ANY:

RECEIVED

AUG 20 1981

Form 9-331
Dec. 1973

O & G CONS. COMM.

Form Approved
Budget Bureau No. 42-R1424

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well gas well other

2. NAME OF OPERATOR
Kerr-McGee Corporation

3. ADDRESS OF OPERATOR
P.O. Box 250 Amarillo, Texas 79189

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 2000' FSL & 1690' FEL (NW/4 SE/4)
AT TOP PROD. INTERVAL: 2000' FSL & 1690' FEL
AT TOTAL DEPTH: 2000' FSL & 1690' FEL

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:	SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF <input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	<input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	<input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE <input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES <input type="checkbox"/>	<input type="checkbox"/>
ABANDON* <input type="checkbox"/>	<input type="checkbox"/>
(other) <u>Drilling</u>	

5. LEASE
Navajo 88 # 14-20-0603-8812

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
Navajo

7. UNIT AGREEMENT NAME
None

8. FARM OR LEASE NAME
Navajo 88

9. WELL NO.
6

10. FIELD OR WILDCAT NAME
Dineh-Bi-Keyah

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 25, T36N, R29E

12. COUNTY OR PARISH | 13. STATE
Apache | Arizona

14. API NO.
02-001-20252

15. ELEVATIONS (SHOW DF, KDB, AND WD)
G.L. 8579', DF 8589', R.K.B. 8591'

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

8-13-81 Drl. from 1450' to 1871', Form Rd. Bd & Sh, Drld. 421', Mud Wt. 9.0.
Lost circ. @ 1679' & 181'.

8-14-81 Drl. from 1871' - 2310', Form. Rd. Bd., Drld. 439', mud wt. 9.5

8-15-81 Drl. from 2310' - 2620', Form. Rd. Bd., Sd, Sh, Drld 310', mud wt. 9.1

8-16-81 Drl. from 2620' - 2850', Form. Sd. & Sh, Drld. 230', mud wt. 9.5
Bit #5, STC 7 7/8" F-2 In @ 2630'.

8-17-81 Drl. from 2850' to 3070', Form Sd, Drld. 220', mud wt. 9.0

8-18-81 Drl. from 3070' to 3312', Form Sd & Sh, Drld. 242', mud wt. 9.0

8-19-81 Drl. from 3312' to 3575', Form Sd & Sh, Drld. 263', mud wt 9.0

Subsurface Safety valve: manu. and type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Kelley Eisenberg TITLE St. Eng. Asst. DATE August 24, 1981

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

722

RECEIVED

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

AUG 17 1981
O & G CONS. COMM

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well gas well other

2. NAME OF OPERATOR
Kerr-McGee Corporation

3. ADDRESS OF OPERATOR
P.O. Box 250 Amarillo, Texas 79189

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 2000' FSL & 1690' FEL (NW/4 SE/4)
AT TOP PROD. INTERVAL: 2000' FSL & 1690' FEL
AT TOTAL DEPTH: 2000' FSL & 1690' FEL

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

5. LEASE
Navajo 88 # 14-20-0603-8812

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
Navajo

7. UNIT AGREEMENT NAME
None

8. FARM OR LEASE NAME
Navajo 88

9. WELL NO.
6

10. FIELD OR WILDCAT NAME
Dineh-Bi-Keyah

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 25, T36N, R29E

12. COUNTY OR PARISH | 13. STATE
Apache | Arizona

14. API NO.
02-001-29252

15. ELEVATIONS (SHOW DF, KDB, AND WD)
G.L. 8579', DF 8589', R.K.B. 8591'

REQUEST FOR APPROVAL TO: SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

PULL OR ALTER CASING

MULTIPLE COMPLETE

CHANGE ZONES

ABANDON*

(other) spud, run surf. csg. drlg.

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

- 8-09-81 Spud; Drld from 0 - 130', Mud wt. 8.9 Bit #1; 12 1/4" STC.
- 8-10-81 Drld. from 130' to 415'; Form. sd & Sh; Drld 285' Mud wt 8.9 Bit #2; 12 1/4" HTC. In @ 175'. Ran 9 jts. 8 5/8"; 24#, K-55 csg. Cmt. w/365 sx. Cl. "H" Circ. out approx. 60 sx.
- 8-11-81 Drld. from 415' to 805', Form. Sd & Sh; Drld 390'; Mud wt. 8.8. Bit #3; 7 7/8" STC. in @ 415.
- 8-12-81 Drld. from 805' to 1450', Form. Sh.; Drld. 645'; Mud wt. 9.0 Bit #4; 7 7/8" STC. In @ 884

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Kelley Eisenberg TITLE Sr. Eng. Asst. DATE August 14, 1981
Kelley Eisenberg
(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

722

RECEIVED

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

AUG 17 1981
O & G CONS. COMM.

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well gas well other

2. NAME OF OPERATOR
Kerr-McGee Corporation

3. ADDRESS OF OPERATOR
P.O. Box 250 Amarillo, Texas 79189

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 2000' FSL & 1690' FEL (NW/4 SE/4)
AT TOP PROD. INTERVAL: 2000' FSL & 1690' FEL
AT TOTAL DEPTH: 2000' FSL & 1690' FEL

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:	SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF <input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	<input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	<input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE <input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES <input type="checkbox"/>	<input type="checkbox"/>
ABANDON* <input type="checkbox"/>	<input type="checkbox"/>
(other) <u>spud, run surf. csg. drlg.</u>	

5. LEASE
Navajo 88 # 14-20-0603-8812

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
Navajo

7. UNIT AGREEMENT NAME
None

8. FARM OR LEASE NAME
Navajo 88

9. WELL NO.
6

10. FIELD OR WILDCAT NAME
Dineh-Bi-Keyah

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 25, T36N, R29E

12. COUNTY OR PARISH | 13. STATE
Apache | Arizona

14. API NO.
02-001-29252

15. ELEVATIONS (SHOW DF, KDB, AND WD)
G.L. 8579', DF 8589', R.K.B. 8591'

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

8-09-81 Spud; Drld from 0 - 130', Mud wt. 8.9 Bit #1; 12 1/4" STC.

8-10-81 Drld. from 130' to 415'; Form. sd & Sh; Drld 285' Mud wt 8.9 Bit #2; 12 1/4" HTC. In @ 175'. Ran 9 jts. 8 5/8"; 24#, K-55 csg. Cmt. w/365 sx. Cl. "H" Circ. out approx. 60 sx.

8-11-81 Drld. from 415' to 805', Form. Sd & Sh; Drld 390'; Mud wt. 8.8. Bit #3; 7 7/8" STC. in @ 415.

8-12-81 Drld. from 805' to 1450', Form. Sh.; Drld. 645'; Mud wt. 9.0 Bit #4; 7 7/8" STC. In @ 884

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Kelley Eisenberg TITLE Sr. Eng. Asst. DATE August 14, 1981
Kelley Eisenberg
(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

722

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1a. TYPE OF WORK
 DRILL DEEPEN PLUG BACK

b. TYPE OF WELL
 OIL WELL GAS WELL OTHER SINGLE ZONE MULTIPLE ZONE

2. NAME OF OPERATOR
 Kerr-McGee Corporation JUN 4 1981

3. ADDRESS OF OPERATOR
 P. O. Box 250 O & G CONS. COMM.

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)
 At surface: 2000' FSL & 1690' FEL
 At proposed prod. zone: 2000' FSL & 1690' FEL

5. LEASE DESIGNATION AND SERIAL NO.
 14-20-0603-8812

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
 Navajo

7. UNIT AGREEMENT NAME
 N.A.

8. FARM OR LEASE NAME
 Navajo Tract 88

9. WELL NO.
 6

10. FIELD AND POOL, OR WILDCAT
 Dineh-bi-Keyah

11. SEC. T. R. M. OR BLE. AND SURVEY OR AREA
 Sec. 25, T36N, R29E

12. COUNTY OR PARISH
 Apache

13. STATE
 Arizona

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE
 13.5 miles Southwest from Red Rock, Arizona

15. DISTANCE FROM PROPOSED LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drlg. unit line, if any)
 1690'

16. NO. OF ACRES IN LEASE
 2560

17. NO. OF ACRES ASSIGNED TO THIS WELL
 40

18. DISTANCE FROM PROPOSED LOCATION TO NEAREST WELL, DRILLING COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT.
 1529'

19. PROPOSED DEPTH
 4500' ARE

20. ROTARY OR CABLE TOOLS
 Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)
 8569' ungraded ground

22. APPROX. DATE WORK WILL START
 May 1, 1981

23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
24"	20"	94#/ft	100'	12 vds. Redimix
12 1/4"	8 5/8"	24#/ft	400'	300 sx.
7 7/8"	5 1/2"	14#/ft	4500'	300 sx.

1. Drill 24" surface hole & set 20" conductor casing to 100' & cement.
2. Drill 12 1/4" hole and set 8 5/8" surface casing to 400' w/good returns.
3. Log B.O.P. checks in daily drill reports and drill 7 7/8" hole to T.D.
4. Run logs and run 5 1/2" casing & cement if well is productive.
5. Run other logs as needed and perforate and stimulate as needed.

EXHIBITS ATTACHED

- A. Location and Elevation Plat
- B. Ten-Point Compliance Program
- C. Blowout Preventer Diagram
- D. The Multi-Point Surface Use and Operations Plan
- E. Access Road Map onto Location
- F. Radius Map of Field
- G. Drill Pad Layout and Cut and Fill Section
- H. Drill Rig & Production Facilities Layout
- I. Archaeology Report
- J. Rehabilitation Plan

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

SIGNED Kelley Eisenberg TITLE Engineering Assistant DATE February 26, 1981

PERMIT NO. _____ APPROVAL DATE _____

APPROVED BY _____ TITLE _____


CONDITIONS OF APPROVAL, IF ANY: _____

APPROVED
AS AMENDED
JUN 02 1981
James F. Sims
DISTRICT ENGINEER

722

*See Instructions On Reverse Side
Arizona OCC

COMPANY KERR-McGEE CORPORATION
 LEASE NAVAJO WELL NO. 88-6
 SEC. 25, T. 36N, R. 29E
APACHE COUNTY, ARIZONA
 LOCATION 2000' FSL 1690' FEL
 ELEVATION 8569 ungraded ground

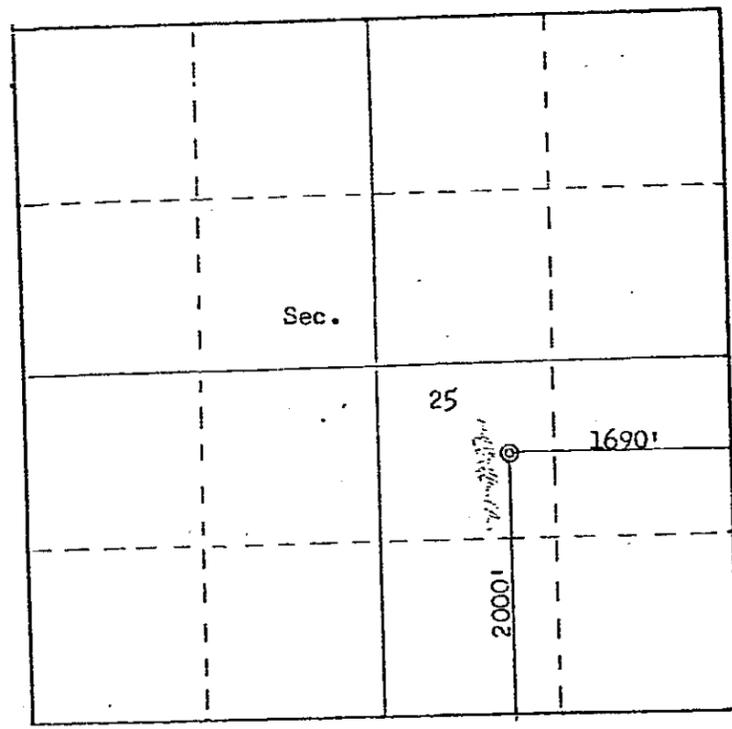

SCALE—4 INCHES EQUALS 1 MILE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTE OF ACTUAL SURVEYS MADE BY ME UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

RECEIVED
 MAR 13 1981
 U. S. GEOLOGICAL SURVEY
 FARMINGTON, N. M.

Fred B. Kerr Jr.
 Fred B. Kerr Jr.

SEAL: #3950 Registered Land Surveyor.

SURVEYED December 5, 1980

FARMINGTON, N. M.

EXHIBIT "B"

TEN-POINT COMPLIANCE PROGRAM
OF NTL-6 APPROVAL OF OPERATIONS

1. The Geologic Surface Formation

The surface formation is the Chuska.

2. Estimated Tops of Important Geologic Markers

Chuska	Surface
Coconina	1679'
Hermosa	3529'
Black Shale	4039'
Intrusive	4199'

3. Estimated Depths of Anticipated Water, Oil, Gas, or Minerals

Intrusive	4199'	Oil
-----------	-------	-----

4. The Proposed Casing Program

- (a) Conductor casing: Set 20", 94#/ft., H-40 ST&C, new casing to 100' in 24" surface hole; cement with 12 yards of redimix.
- (b) Surface casing: Set 8 5/8", 24#/ft., K-55 ST&C, new casing to 400' in 12 1/4" surface hole; cement with 300 sacks Class "B" with 2% CaCl and 1/4 lb. flocele per sack.
- (c) Production casing: Set 5 1/2" 14#/ft., K-55 ST&C, new casing to TD in 7 7/8" hole; cement with 300 sacks Class "B" with 1/4 lb. flocele per sack.

5. The Operator's Minimum Specifications for Pressure Control

EXHIBIT "C" is a schematic diagram of the blowout preventer equipment. The BOP's will be hydraulically tested to the full working pressure after nipping up and after any use under pressure. Pipe rams will be operationally checked each 24-hour period, as will blind rams each time pipe is pulled out of the hole. Such checks of BOP will be noted on daily drilling reports.

Accessories to BOP will include an upper kelly cock, and choke manifold with pressure rating equivalent to the BOP stack. (API Series 900)

6. The Type and Characteristics of the Proposed Circulating Muds

Mud system will be water-gel with adequate stocks of sorptive agents and other materials on site to handle any anticipated downhole problems as well as possible spills of fuel and oil on the surface. Heavier muds will be added if required.

- (a) 0' - 350' Water, gel and lime to drill surface hole.
Weight of mud: 8.9 to 9.0 ppg
- (b) 350' - T.D. Fresh water-gel
Weight of mud: 8.9 to 9.0 ppg
Viscosity: 38 to 48 sec.
Water loss: 8 to 10 cc

7. The Auxiliary Equipment to be Used

No auxiliary equipment will be used. The mud program will be monitored visually.

8. The Testing, Logging and Coring Programs to be Followed

- (a) No tests are anticipated.
- (b) The logging program will consist of Compensated Formation Density - Gamma Ray - Caliper Logs from total depth to bottom of surface casing. Run Gamma Ray from bottom of surface casing to surface.
- (c) No coring is anticipated.
- (d) Samples will be caught at 10' intervals from bottom of surface casing to total depth.

9. Any Anticipated Abnormal Pressures or Temperatures

No abnormal pressures or temperatures have been noted or reported in wells drilled in the area nor at the depths anticipated in this well.


No hydrogen sulfide or other hazardous fluids or gases have been found, reported or known to exist at these depths in the area.

10. Anticipated Starting Date and Duration of the Operations

The anticipated starting date is set for May 1, 1981, or as soon as possible after examination and approval of drilling requirements. Operations should be completed within 30 days after spudding the well and drilling to casing point.

EXHIBIT "C"

Blowout Preventer Diagram

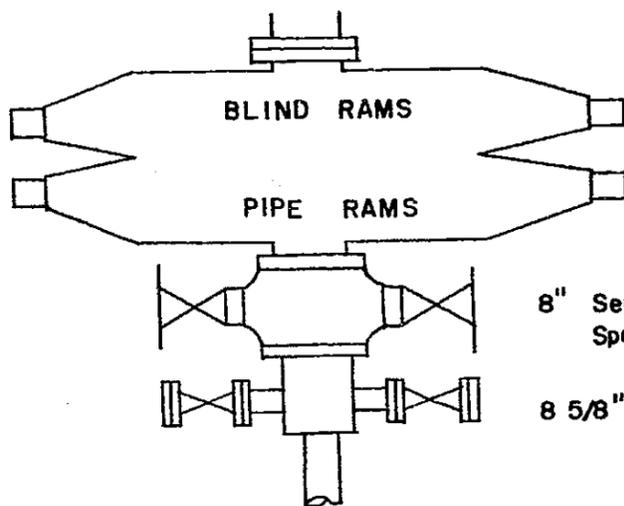

8" 900 Series
Blowout
Preventer

8" Series 900
Spool

8 5/8" Series 900
Casinghead

PRESSURE CONTROL EQUIPMENT
KERR MCGEE CORPORATION
NAVAJO LEASE
DINEH-BI-KEYAH FIELD
APACHE COUNTY, ARIZONA

KERR-MCGEE CORPORATION

EXHIBIT "D"

MULTI-POINT SURFACE USE AND OPERATIONS PLAN

Attached to Form 9-331C
Kerr-McGee Corporation
Navajo 88-6
Sec. 25, T36N, R29E
NW SE 1/4
Apache County, Arizona

1. Existing Roads

- A. The proposed well site and elevation plat is shown as EXHIBIT "A".
- B. The distance from Shiprock, New Mexico, is 5 miles south on Highway 666. Turn right (west) on Navajo Road No. 13 and proceed 20 miles to Red Rock, Arizona. Continue south on dirt road (Lukachukai Road) for 4 miles to "Y" in road. Take right hand fork (west) and proceed 3 miles to Kerr-McGee Warehouse. The Navajo #88-6 is located approximately 2.15 miles S 75° W of the warehouse as shown on attached map (Exhibits E & E₁).
- C. All roads are labeled into location. No new access road is needed. The logging trail needs minor improvement.
- D. N/A
- E. This is a development well. All existing roads within a one-mile radius are shown on EXHIBIT "E".
- F. The existing roads need no improvement except for the logging road which needs minor improvement.

2. Planned Access Roads

Map showing all necessary access roads to be constructed or reconstructed is shown as EXHIBIT "E" for the following:

- (1) The maximum width of the running surface of the 865 feet of access road as you leave the existing graded road will be 18'.
- (2) The grade will be 8% (eight percent) or less.
- (3) No turn outs are planned.
- (4) Appropriate water bars will be constructed to assure drainage off location to conform with the natural drainage pattern.
- (5) N/A

- (6) Surfacing materials will be native soil.
- (7) No gates, cattle guards, or fence cuts are needed.
- (8) Reconstructed road is centerline-flagged.

3. Location of Existing Wells

For all existing wells within a one mile radius of development well, see EXHIBIT "F".

- A. The number of water wells within a one mile radius of this location is none.
- B. The number of abandoned wells in this one mile radius is two.
- C. There are no temporarily abandoned wells.
- D. The number of disposal wells is none.
- E. There are no wells presently being drilled.
- F. The number of producing wells within this one mile radius is seven.
- G. The number of shut-in wells is one.
- H. There are no injection wells.
- I. There are no monitoring or observation wells for other uses.

4. Location of Existing and/or Proposed Facilities

- A. Within a one mile radius of location the following existing facilities are owned or controlled by lessee/operator:
 - (1) Tank Batteries: None
 - (2) Production Facilities: seven flowlines (buried)
 - (3) Oil Gathering Lines: Shown on EXHIBIT "F".
 - (4) Gas Gathering Lines: None
 - (5) Injection Lines: none
 - (6) Disposal Lines: none
- B. If production is obtained, new facilities will be as follows:
 - (1) The production facilities will be flagged and composed of a flow line to be connected to existing oil gathering lines as shown on EXHIBIT "F".

(2) No new facilities needed.

(3) N/A.

(4) N/A.

C. Rehabilitation, whether well is productive or dry, will be made on all unused area in accordance with the restoration plans presented in ITEM #10 following.

5. Location and Type of Water Supply

A. The source of water will be Standing Red Rock Creek, in the Southwest corner of Sec. 11 T30N R30E, which is running water, as shown on EXHIBIT "E".

B. Water will be transported by truck over existing roadways.

C. No water well is to be drilled on this lease.

6. Construction Materials

A. No construction materials are needed for drilling or access roads into the drilling location. The surface soil materials will be sufficient.

B. No construction materials will be taken off the Indian land.

C. All surface soil materials for construction of access roads are sufficient.

D. All major access roads presently exist as shown on EXHIBIT "E".

7. Handling of Waste Materials and Disposal

A. Drill cuttings will be buried in the reserve pit and covered.

B. Drilling fluids will be handled in the reserve pit.

C. Any fluids produced during drilling test or while making production test will be collected in a test tank. If a test tank is not available during drilling, fluids will be handled in reserve pit. Any spills of oil, gas, salt waters, or other noxious fluids will be cleaned up and removed.

- (D) Chemical facilities will be provided for human waste.
- (E) Garbage and non-flammable waste and salts and other chemicals produced during drilling or testing will be handled in trash pit. Flammable waste will be disposed of in trash pit. Drill fluids, water, drilling mud, and tailings will be kept in reserve pit, as shown on EXHIBIT "H".
- (F) After the rig moves out, all materials will be cleaned up and no adverse materials will be left on location. Any dangerous open pit will be fenced during drilling and kept closed until such time as the pit is leveled. Reserve pit will be fenced on three sides and the fourth side fenced upon removal of the rig. The trash pit will be totally enclosed with small mesh wire.

8. Ancillary Facilities

No air strip, camp or other facilities will be built during drilling of this well.

9. Well Site Layout

- A. EXHIBIT "G" is the Drill Pad Layout as staked, with elevations, by Jim O'Leary, Field Foreman for DBK, for the Kerr-McGee Corporation. Cuts and fills have been drafted to visualize the the planned cut across the location spot and to the deepest part of the pad. Topsoil will be stockpiled per BIA specifications determined at time of pre-drill inspection.
- B. EXHIBIT "H" is a plan diagram of the proposed rig and equipment, reserve pit, burn and trash pit, pipe racks and mud tanks. No permanent living facilities are planned.
- C. EXHIBIT "H" includes rig orientation, parking areas, and access road.
- D. The reserve pits will not be lined.

10. Plans for Restoration

- A. Backfilling, leveling and contouring are planned as soon as all pits have dried. Waste disposal and spoils materials will be buried or hauled away immediately after drilling is completed. If production is obtained, the unused area will be restored as soon as possible.
- B. The soil banked material will be spread over the area. Revegetation will be accomplished by planting mixed grasses as per formula provided by the BIA. Revegetation is recommended for road area, as well as around drill pad.

- C. Three sides of the reserve pit will be fenced during drilling operations. Prior to rig release, the reserve pit will be fenced on the fourth side to prevent livestock or wildlife from becoming entrapped; and the fencing will be maintained until leveling and cleanup are accomplished.
- E. If any oil is on the pits and is not immediately removed after operations cease, the pit containing the oil or other adverse substances will be flagged overhead or covered with wire mesh.
- F. The rehabilitation operations will begin immediately after the drilling rig is removed. Removal of oil or other adverse substances will begin immediately or area will be flagged and fenced. Other cleanup will be done as needed. Planting and revegetation is considered best in September, 1981, unless requested otherwise.

11. Other Information

- A. The soil is sandy to silty. No distinguishing geological features are present. The area is covered with pine trees, oak brush, some aspen, and native grass. There are livestock, rabbits, sheep, and deer in the area. The topography is mountainous.
- B. The primary surface use is for grazing. The surface is of the Navajo Tribal lands administered by the Bureau of Indian Affairs.
- C. The closest live water is Standing Red Rock Creek, approximately 1/2 mile N. of the location, as shown on EXHIBIT "E".

There are no known archaeological, historical, or cultural heritages that will be disturbed by this drilling.

The closest occupied dwelling is the Kerr-McGee office located miles from the location, in which someone is there 24 hours a day.
- D. There are no reported restrictions or reservations noted on the oil and gas lease.
- E. Drilling is planned for on or about May 1, 1981. It is anticipated that the casing point will be reached within 20 days after commencement of drilling.

12. Lessee's or Operator's Representative

C. Alan Roberts
Kerr-McGee Corporation
P. O. Box 250
Amarillo, Texas 79189
Phone (806) 359-0351

13. Certification


I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and, that the work associated with the operations proposed herein will be performed by Kerr-McGee Corporation and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved.

Date 3/9/81

C. Alan Roberts
C. Alan Roberts
District Manager
Southwest District - N. A.

CAR/sm

EXHIBIT "E"
Access Road Map
onto Location

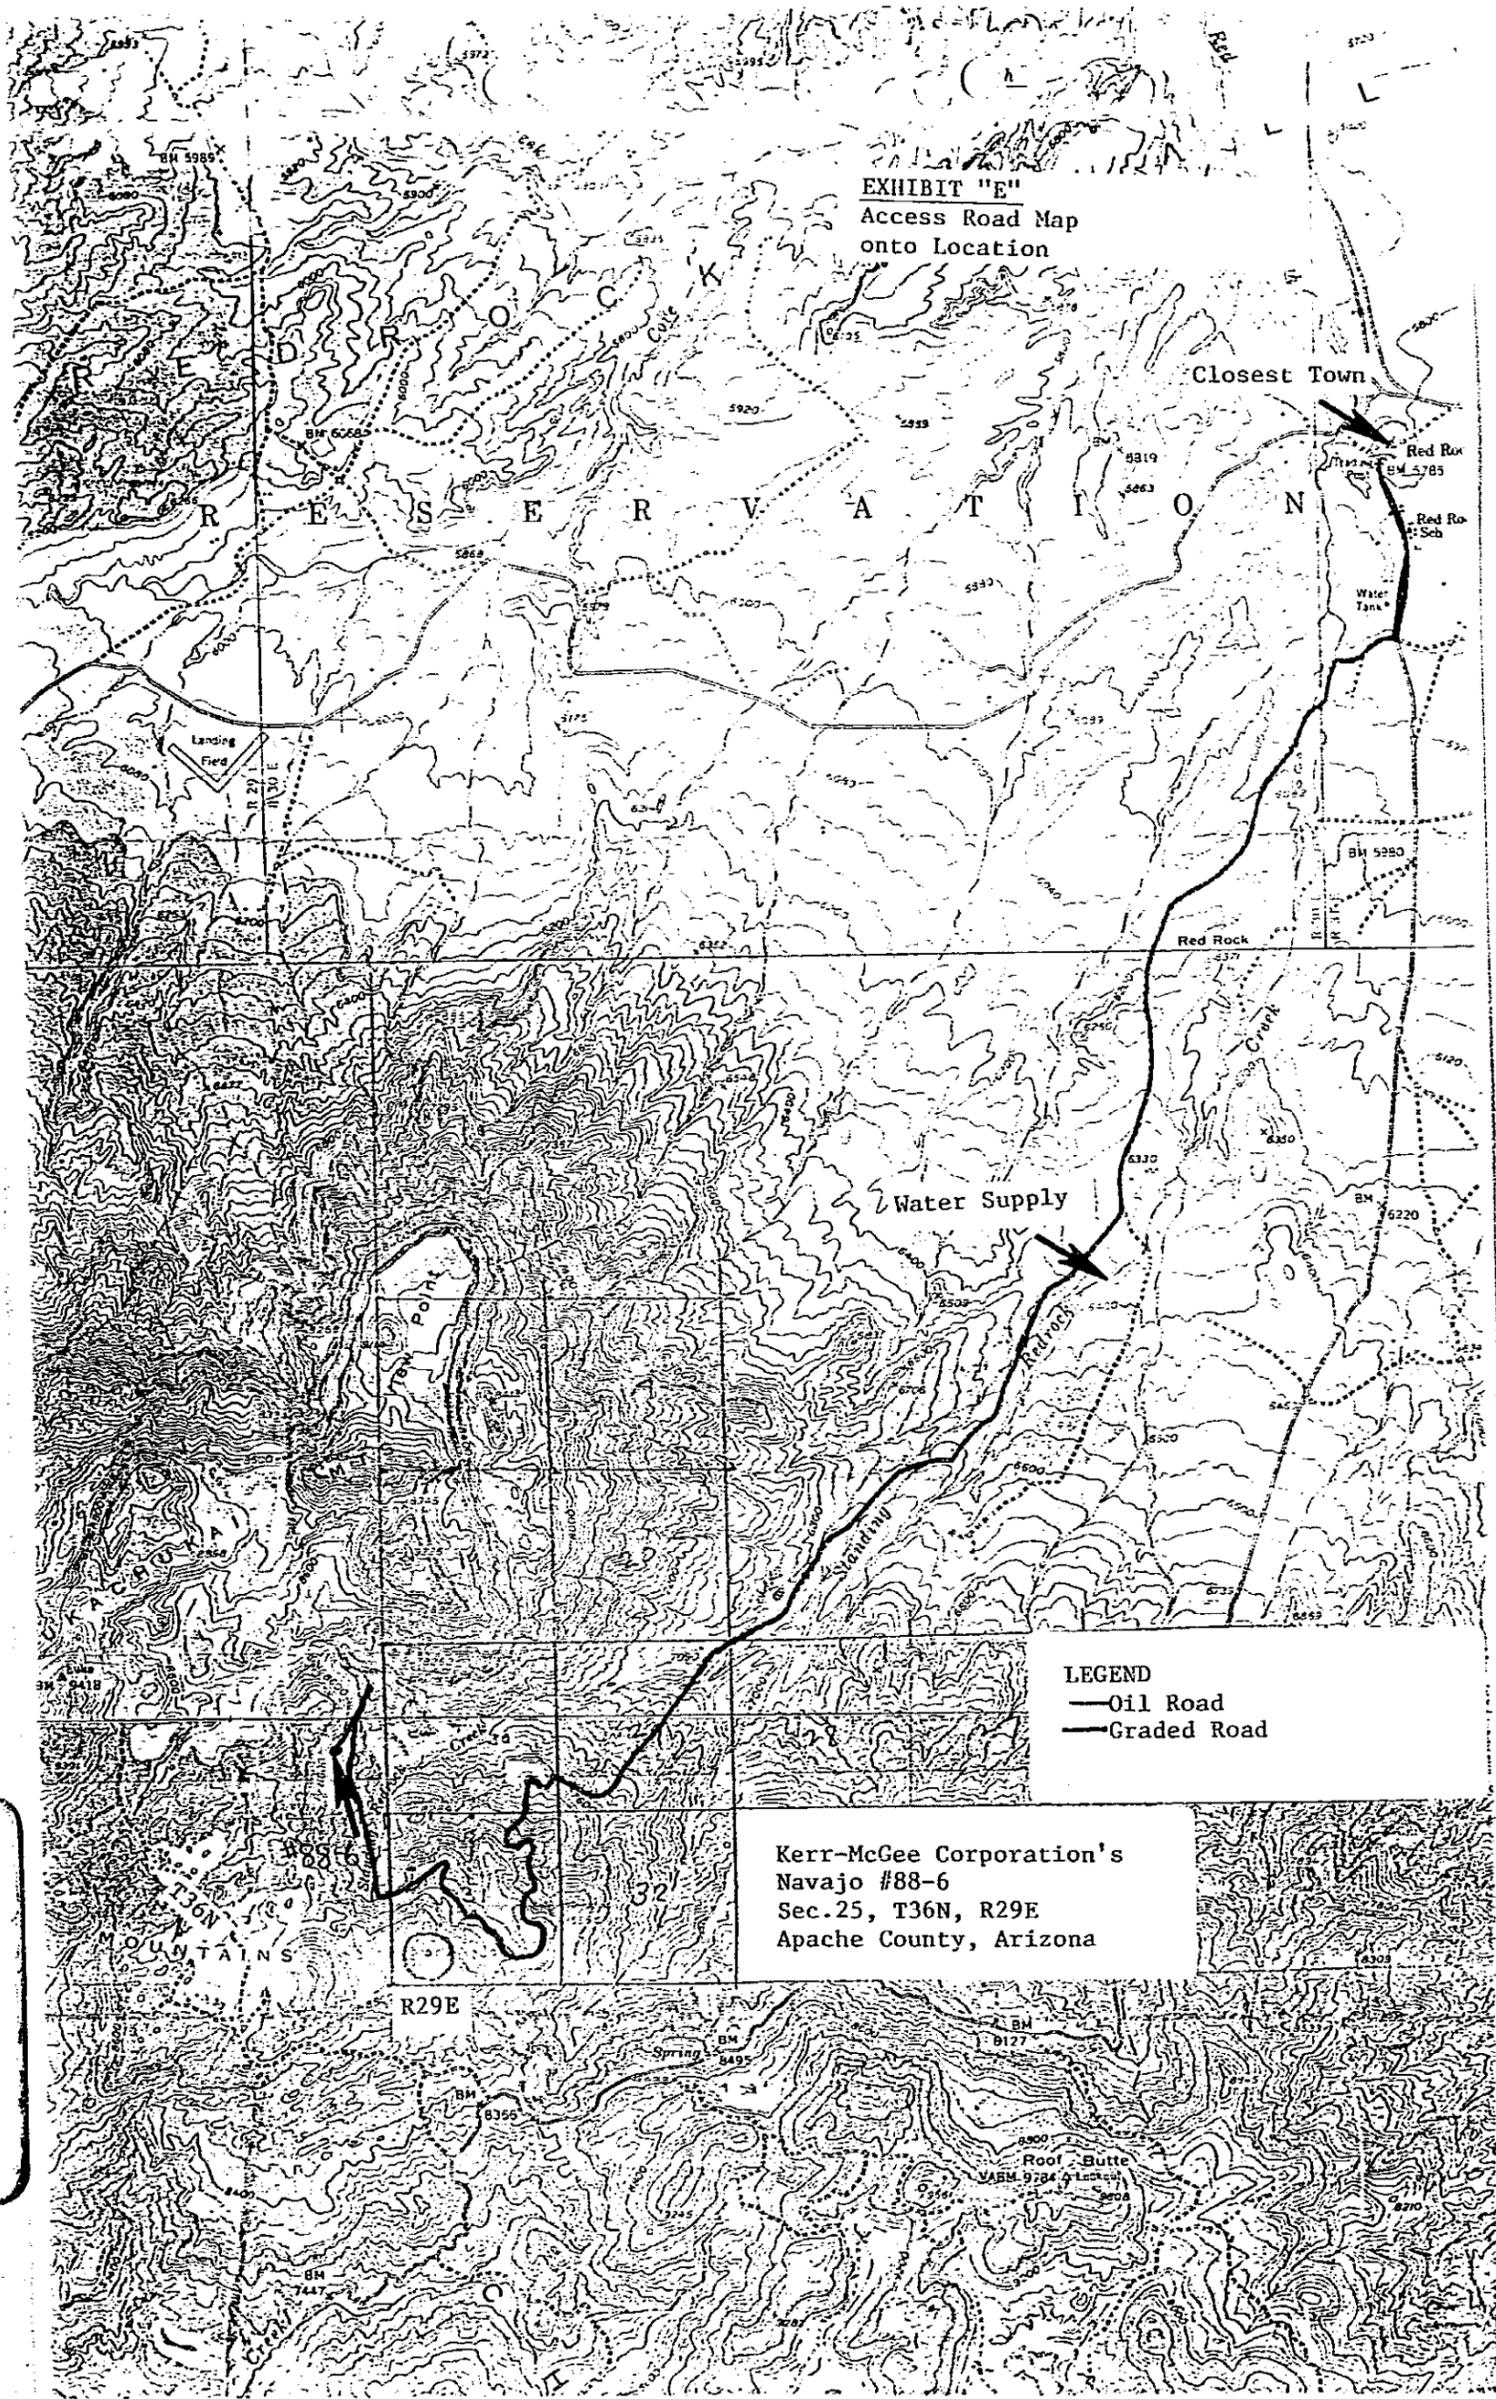

Closest Town

Water Supply

LEGEND
— Oil Road
— Graded Road


Kerr-McGee Corporation's
Navajo #88-6
Sec. 25, T36N, R29E
Apache County, Arizona

R29E

Red Butte
V.A.M. 9784

EXHIBIT "F"

Radius Map of Field

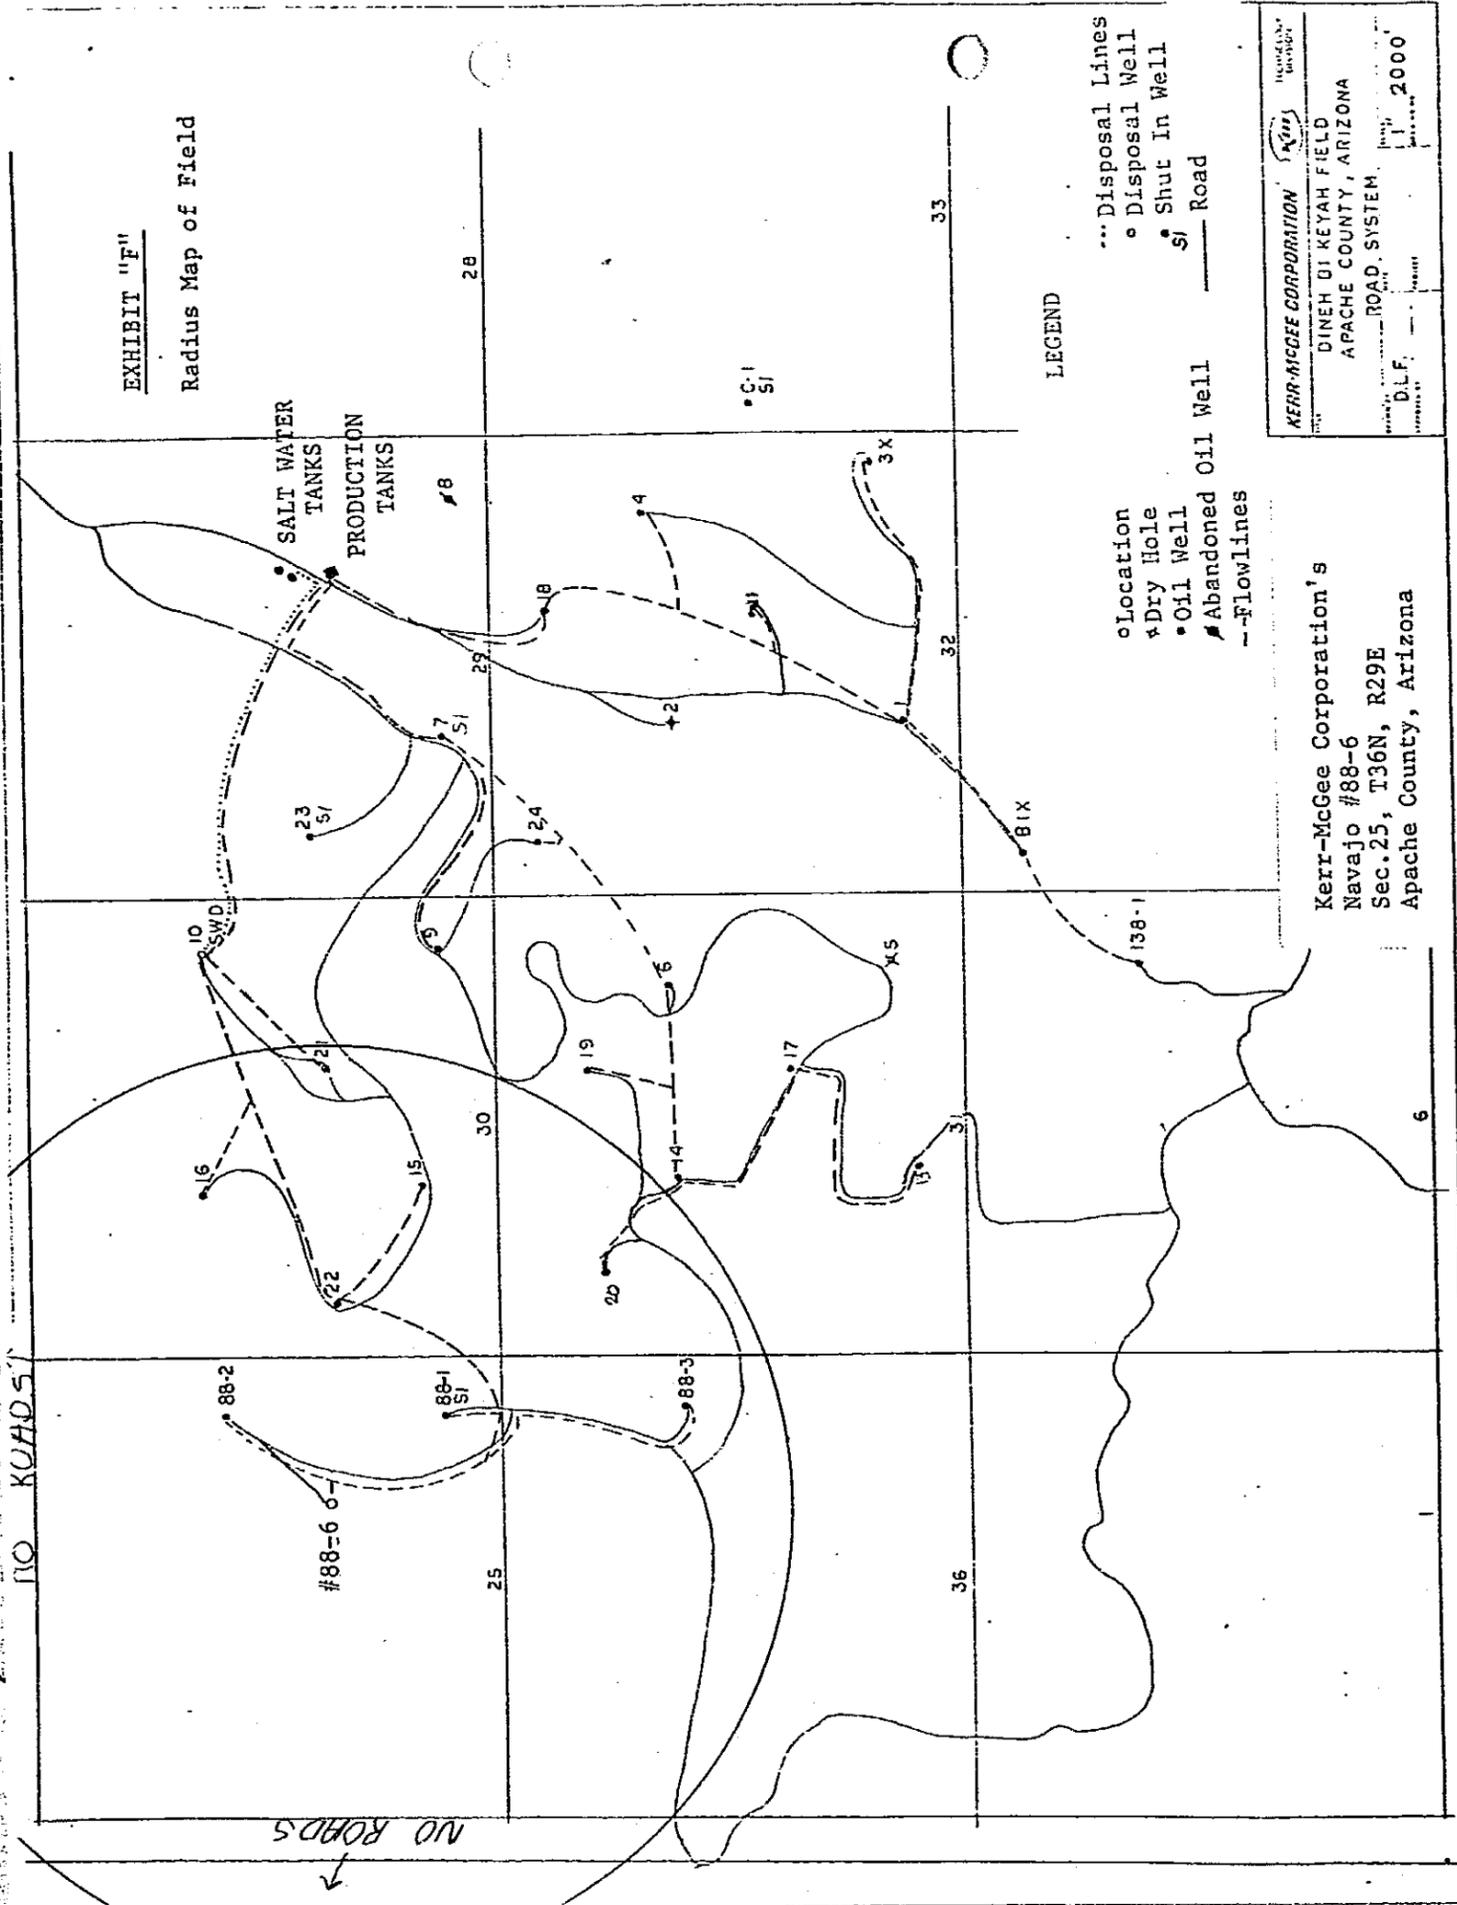



LEGEND

- Disposal Lines
- o Disposal Well
- Shut In Well
- S1 Road

- o location
- Dry Hole
- Oil Well
- Abandoned Oil Well
- Flowlines


KERR-MCGEE CORPORATION
 DINEH OI KEYAH FIELD
 APACHE COUNTY, ARIZONA
 ROAD SYSTEM
 D.L.F. 1" = 2000'

Kerr-McGee Corporation's
 Navajo #88-6
 Sec. 25, T36N, R29E
 Apache County, Arizona

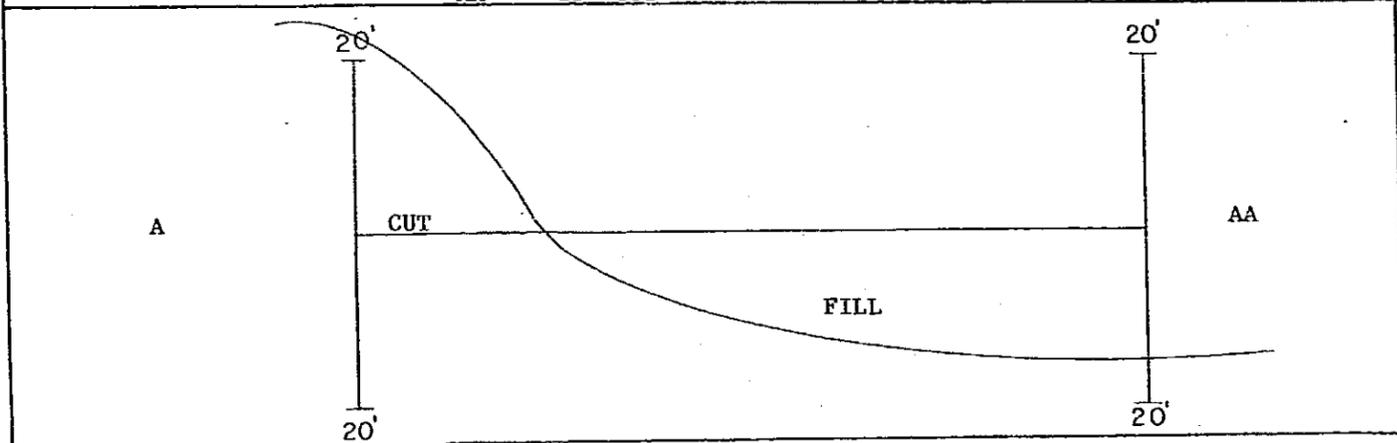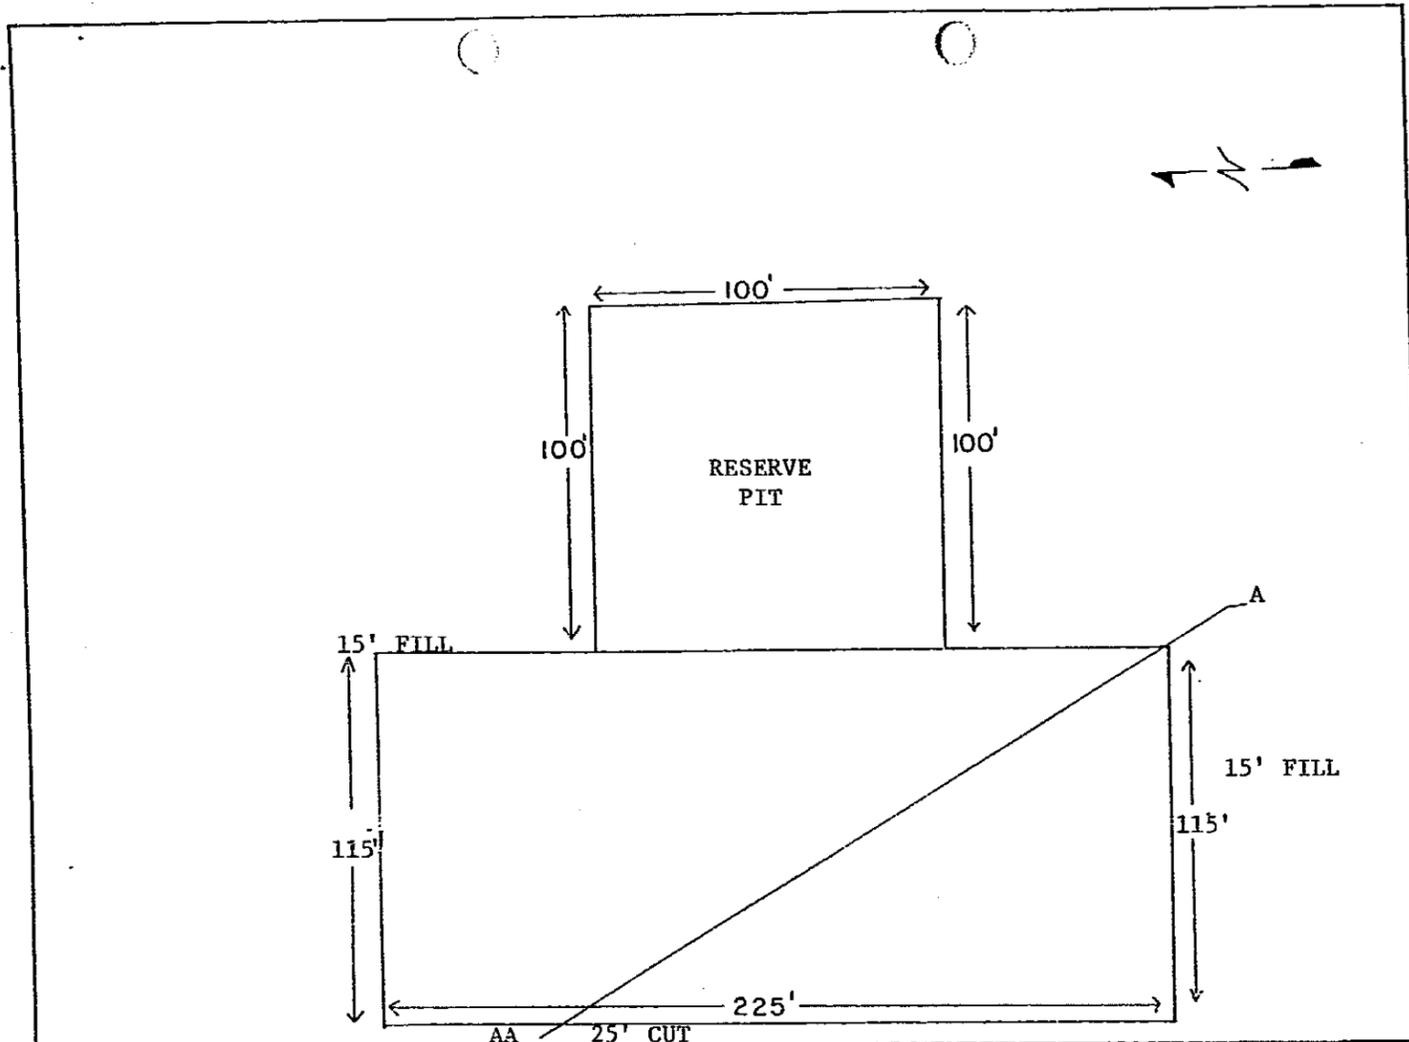


KERR-MCGEE CORPORATION		
<small>KM-4160</small>		
<small>SCALE: HORIZ. 1" = 50'</small>	<small>APPROVED BY:</small>	<small>DRAWN BY CKE</small>
<small>VERT. 1" = 20'</small>		<small>REVISED</small>
<small>DATE: 2/13/81</small>	EXHIBIT "G"	
<small>Drill Pad Layout & Cut-Fill X Section</small>		<small>DRAWING NUMBER</small>
<small>Navajo Well No.88-6</small>		G

EXHIBIT "H"
Drill Rig and
Production Facilities
Layout

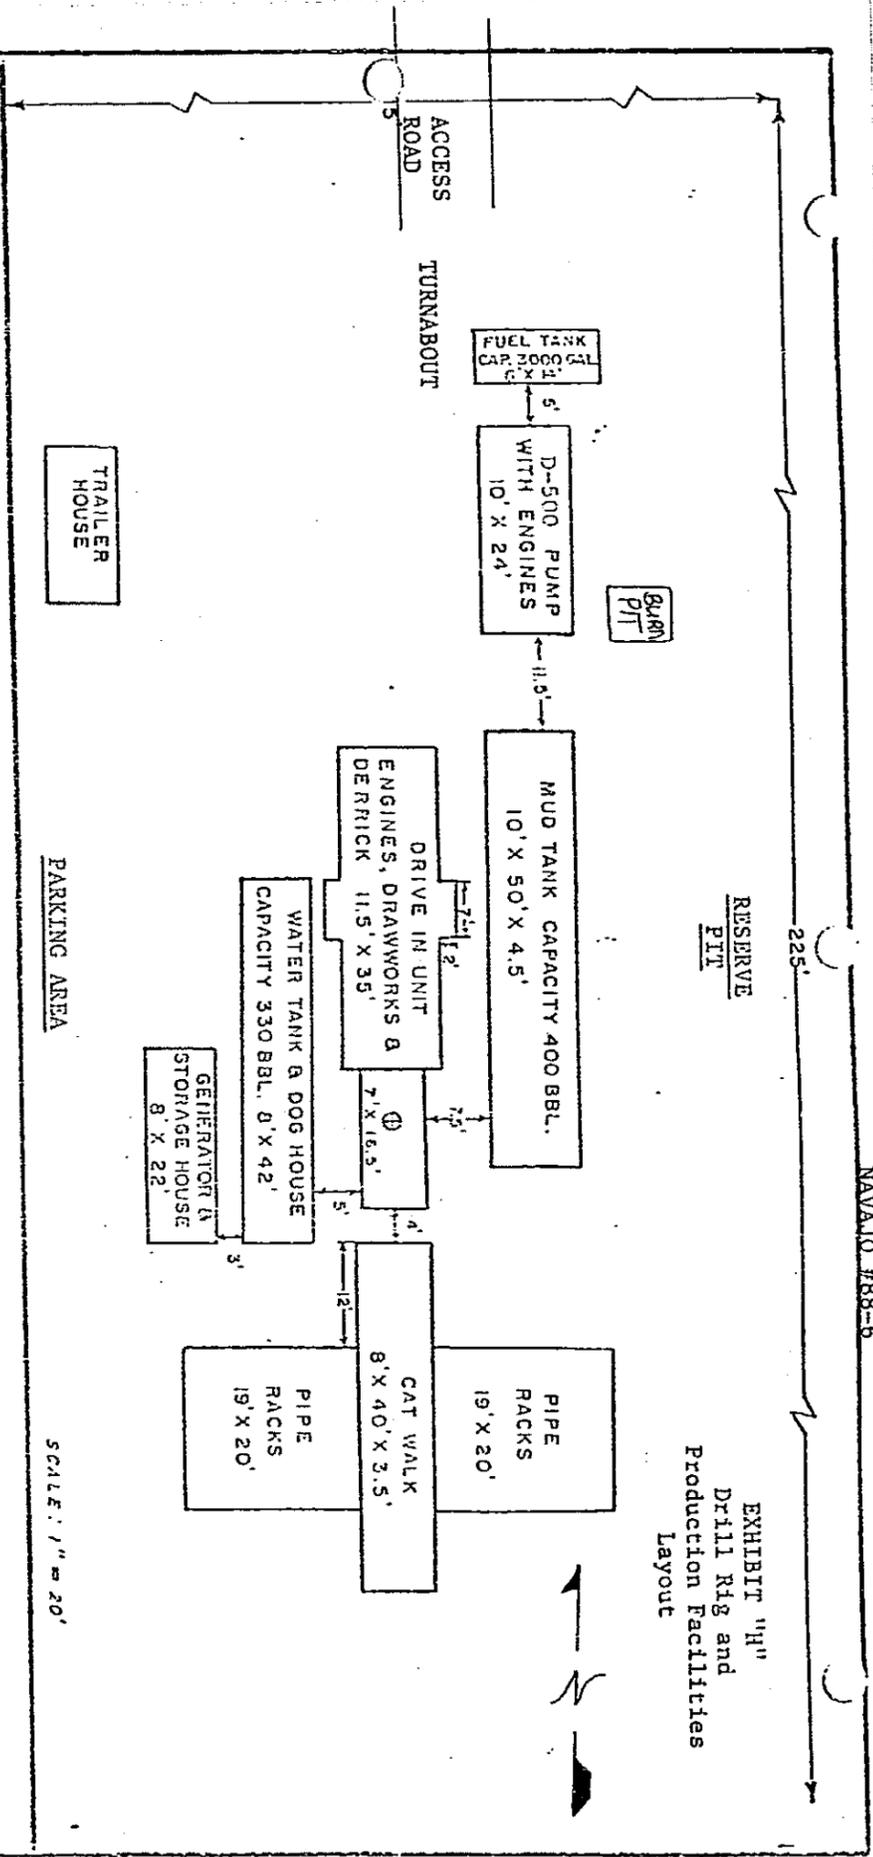

RIG NO. 70

RAT & MOUSE HOLE DETAIL



- (1) GROUND LEVEL TO BOTTOM OF ROTARY BEAMS : 7 FEET—4 INCHES
- (2) GROUND LEVEL TO TOP OF ROTARY TABLE : 9 FEET
- (3) RECOMMENDED LOCATION SIZE : 225 FEET X 115 FEET
 - 100 FEET FROM CENTER OF HOLE TO FRONT
 - 125 FEET FROM CENTER OF HOLE TO BACK
 - 24 FEET FROM CENTER OF HOLE TO RESERVE PIT
 - 75 FEET FROM CENTER OF HOLE TO EDGE
- (4) ABOVE LAYOUT IS SUGGESTED, HOWEVER EQUIPMENT CAN BE REARRANGED TO FIT TIGHT LOCATIONS.

SCALE: 1/4" = 20'

Project No. 92-86

Federal Antiquities Permit
79-NM-178
Navajo Nation #46

EXHIBIT "I"

An Archaeological Survey of
6 Oil Wells and Associated Access Roads
Apache County, Arizona

for

Kerr McGee

Locations

Kerr McGee #88-6 Navajo
Kerr McGee Navajo #27
Kerr McGee #25 Navajo
Kerr McGee Navajo 85-5
Kerr McGee #3 Navajo 138
Kerr McGee #26 Navajo

by

Margaret A. Powers
Supervisory Archaeologist

Submitted by
Margaret A. Powers
Principal Investigator

DIVISION OF CONSERVATION ARCHAEOLOGY

Contributions to Anthropology Series, No. 326
San Juan County Archaeological Research Center and Library

December 15, 1980

ABSTRACT

On December 12, 1980, the Division of Conservation Archaeology of the San Juan County Museum Association completed an archaeological survey of six oil wells and associated access roads for Kerr McGee. The survey area is located on the Navajo Reservation, Apache County, Arizona in the Chuska Mountains and is under the jurisdiction of the Bureau of Indian Affairs and the Navajo Nation. Only isolated artifacts of recent origin were located. Since these have minimal research potential and have been documented during the survey, clearance is recommended for all locations except Kerr McGee #26 Navajo which had excessive snow cover and could not be inspected.

INTRODUCTION

On December 12, 1980, the Division of Conservation Archaeology (DCA) of the San Juan County Museum Association conducted an archaeological survey for Kerr McGee. Mr. Victor Eaton of Atchison Construction requested the survey on December 4, 1980. Margaret A. Powers administered the project for DCA; Mr. Eaton administered the project for Kerr McGee.

In recognition of the limited, nonrenewable nature of archaeological remains, federal and state governments have enacted legislation that is designed to conserve and protect these resources. The principal federal legislation includes the Antiquities Act of 1906 (PL 52-209), the Historic Preservation Act of 1966 (PL 89-665), the National Environmental Policy Act of 1969 (PL 91-252), the 1971 Executive Order No. 11593, the Archaeological and Historical Conservation Act of 1974 (PL 93-291), and the Archaeological Act of 1979 (PL 96-95).

In addition, the states of Arizona, New Mexico, Utah, and Colorado have enacted laws to ensure compliance with federal legislation and to protect archaeological resources within their jurisdiction. Work undertaken in the course of this project is governed by the stipulations of Navajo Nation Permit #46 and Federal Antiquities Permit No. 79-NM-178 and is for purposes of compliance with these statutes.

Margaret A. Powers, DCA archaeologist, surveyed the project area for cultural remains. Dr. David Doyel, Director of the Navajo Cultural Resources Program and Dr. Barry Holt, Bureau of Indian Affairs Navajo Area Archaeologist were notified of the survey schedule prior to beginning fieldwork. The following persons were present during the field inspection: Mr. James O'Leary of Kerr McGee, Mr. Vic Eaton of Atchison Construction, and Mr. Ron Milford and Mr. Dave Bahe of the BIA Foresty Office in Fort Defiance, Arizona.

METHODS

The area was surveyed by inspecting all snow-free patches on each pad, access road and buffer zone or by using zig-zag parallel transects spaced approximately 20m apart where snow cover was minimal. A buffer zone of 50 feet was surveyed around each pad and of 35' on each side of the proposed access roads. The archaeologist recorded all cultural remains. Those whose information potential exceeded what could be extracted during the survey phase were assigned site status. Other cultural remains were documented as isolated loci (IL). Pertinent environmental data were also recorded.

In addition to field inspection, the archaeologist conducted a search of the records at the San Juan County Archaeological Research Center and Library to determine if any sites had been

previously recorded in the project area.

The Environment

All proposed developments are situated on the northeastern flanks of the Chuska Mountains in the headwaters of Standing Red Rock Creek. Much of the survey area is on steeply sloping terrain. The vegetation consists of mixed forest species, predominantly Ponderosa pine (Pinus ponderosa), Douglas fir (Pseudotsuga menziesii), and aspen (Populus tremuloides). The understory is dominated by snowberry (Symphoricarpos spp.). The surface is typical of forest zones, a thick layer of matted needles and leaves, partially decayed to form a dark humic layer. Fallen trees criss-cross the forest floor and form "thickets" many square meters in area. Logging activities are evident throughout the forest in the form of logging trails and sawn tree stumps. Deer, rabbit, squirrel, and porcupine signs were found in the survey areas.

PROJECT AREAS

Kerr McGee #88-6 Navajo

Legal Description: 2000' F/SL, 1690' F/EL, Section 25, T36N, R29E, Salt-Gila, Apache County, Arizona

UTM Coordinates: Zone 12, 4040450N, 663850E, (center stake)

Map Source: U.S.G.S. 15' Lukachukai, Arizona (1955)

Land Jurisdiction: Navajo Nation, Bureau of Indian Affairs

Project Area: 300' X 300' (pad)
30' X ca. 600' (road), 2.5 acres

Description: The pad lies on an east facing slope of approximately 80°, rising more steeply to the west. The access road leaves the pad on the east side and runs southeast to join an existing bladed road. Snow on the access road was patchy with about 30% coverage. The east half of the pad was snow covered by approximately 60% of the area but the west half had no more than 10% snow cover.

Cultural Resources: No artifact scatters were detected in the aspen area. No structural remains are present. Isolated artifacts may have been obscured by the patches of snow.

Recommendation: Because no significant cultural resources were evident, DCA recommends archaeological clearance.

Kerr McGee Navajo #27

Legal Description: 600' F/EL, 2260' F/SL, Section 31, T36N, R30E, Salt-Gila, Apache County, Arizona

UTM Coordinates: Zone 12, 4038975N, 665900E, (center stake)

Map Source: U.S.G.S. 15' Lukachukai, Arizona (1955)

Land Jurisdiction: Navajo Nation, Bureau of Indian Affairs

Project Area: 300' X 300' (pad)
30' X ca. 800' (road), 2.6 acres

Description: The proposed well is located in a heavily wooded area with occasional rock outcrops. There is a knoll to the southeast of the well pad and the terrain drops steeply to the south of the pad. The access road leaves the pad on the northwest side and circles around to the southeast to join an existing graded road. Snow cover over the area was patchy, covering 30 to 40% of the project area.

Cultural Resources: No artifacts were evident in the patches of ground that were not snow covered. Some isolates may have been missed in the survey but no large sites or structural remains were present. A few carvings of dates (1969-1974) and the phase "Red Rock Property" were cut into the bark of some aspens.

Recommendation: Because of the absence of significant cultural remains, DCA recommends archaeological clearance.

Kerr McGee #25 Navajo

Legal Description: 1140' F/NL, 2090' F/WL, Section 31, T36N, R30E,
Salt-Gila, Apache County, Arizona

UTM Coordinates: Zone 12, 4039475N, 665075E, (center stake)

Map Source: U.S.G.S. 15' Lukachukai, Arizona-New Mexico (1955)

Land Jurisdiction: Navajo Nation, Bureau of Indian Affairs

Project Area: 300' X 300' (pad)
30' X 400' (road), 2.3 acres

Description: The proposed pad is located on a northeast facing slope that overlooks a canyon in the Standing Red Rock drainage. The gradient is gentler to the southeast where the access road departs. The access road runs southeast partially along a logging trail to intersect on existing bladed road. Snow cover was approximately 20%, with slightly heavier snow on the northeast corner of the pad.

Cultural Resources: One tire segment and one aluminum pop-top soda can were noted along the access road. Although snow may have obscured isolated artifacts, significant artifact scatters or structural remains would have been evident if present.

Recommendation: Since no significant cultural remains were present, archaeological clearance is recommended.

Kerr McGee Navajo 88-5

Legal Description: 580' F/EL, 1000' F/NL, Section 36, T36N, R29E,
Salt-Gila, Apache County, Arizona

UTM Coordinates: Zone 12, 4039500N, 665800E (center stake)

Map Source: U.S.G.S. 15' Lukachukai, Arizona (1955)

Land Jurisdiction: Navajo Nation, Bureau of Indian Affairs

Project Area: 300' X 300' (pad)
30' X 1200' (road), 2.9 acres

Description: The proposed pad sits on a small saddle amid steep slopes. The access road leaves the pad and runs northeast on a steep wooded slope to a former tank battery. The road then sitchbacks and runs southeast on a previously graded road through "sugar" sand up a steep grade to join an existing graded road. Snow cover on the access road and pad was approximately 20% with slightly higher coverage on the northeast corner of the pad, perhaps as much as 40%.

Cultural Resources: No structural remains or artifact scatters were evident, nor are any likely given the steepness of the terrain. No isolates were noted but they could easily have been missed because of the patchy snow cover.

Recommendation: Because of the absence of significant cultural remains, DCA recommends clearance.

Kerr McGee #3 Navajo 138

Legal Description: 600' F/NL, 2200' F/EL, Section 6, T35N, R30E,
Salt-Gila, Apache County, Arizona

UTM Coordinates: Zone 12, 4038050N, 665375E, (Center Stake)

Map Source: U.S.G.S. 15' Lukachukai, Arizona (1955)

Land Jurisdiction: Navajo Nation, Bureau of Indian Affairs

Project Area: 300' X 300' (pad)
30' X 600' (road), 2.5 acres

Description: The pad is located on a gentle westerly slope in an aspen-Ponderosa pine forest. Snow cover was less than 10%. The access road leaves the pad and runs to the west to link up with a logging trail. The logging trail continues west to intersect an existing bladed road.

Cultural Resources: Two rusted soda cans with church key openings were found west and northwest of the center stake. They are probably associated with logging activities.

Recommendation: Because of the absence of significant cultural remains, archaeological clearance is recommended.

Kerr McGee #26 Navajo

Legal Description: 2100' F/SL, 800' F/WL, Section 31, T36N, R30E,
Salt-Gila, Apache County, Arizona

UTM Coordinates: Zone 12, 4038875N, 664675E (center stake)

Map Source: U.S.G.S. 15' Lukachukai, Arizona-New Mexico (1955)

Land Jurisdiction: Navajo Nation, Bureau of Indian Affairs


Project Area: 300' X 300' (pad)
30' X 900' (road), 2.9 acres

Description: The well pad is situated in a gently sloping and rolling area of a large level bench below the mountain crest. The terrain drops steeply to north and east. The access road leaves the pad to the east and bends back to the south along a logging trail before descending a slope to the west to join an existing bladed road. Snow cover on the pad and on the first 300 feet of access road leaving the pad exceeded 70% in unbroken cover. The remainder of the access road exhibited no more than 20% patchy snow cover.

Cultural Resources: One broken chain saw guard probably from past logging was found along the access road. No other cultural remains were noted.

Recommendation: Because of the unbroken and extensive snow cover on the pad and first 300 feet of access road, an adequate archaeological survey was not possible. Therefore, clearance is not recommended at this time. The remainder of the access road was free of cultural remains and archaeological clearance is recommended.

DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

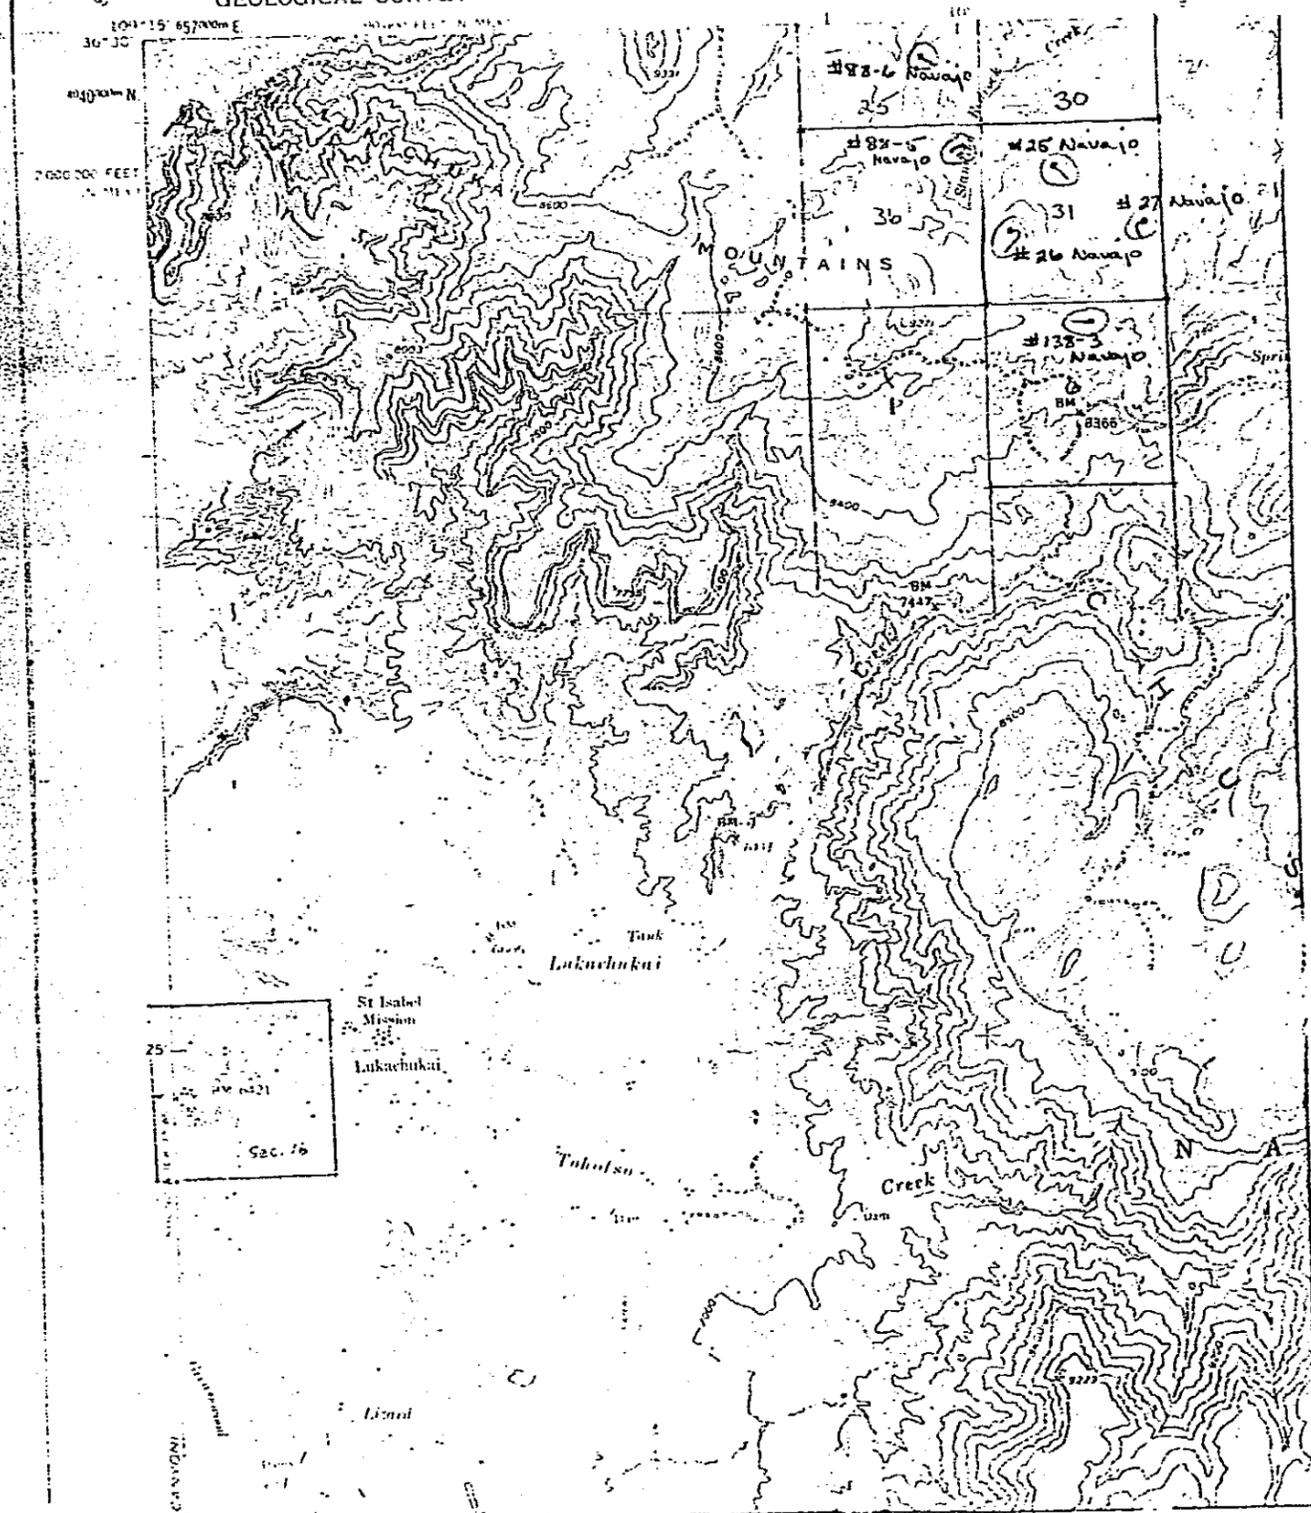

USGS 15' LUKACHUKAI QUADRANGLE,
ARIZONA-NEW MEXICO (1955), T35 & 36N,
R29 & 30E



Permit #46
Federal Antiquities
Permit #81-NV/VT/AZ-085

Addendum to
An Archaeological Survey of
6 Oil Wells and Associated Access Roads,
Apache County, Arizona for Kerr McGee

by

Margaret A. Powers

On January 15, 1981, the Division of Conservation Archaeology (DCA) resurveyed 4 proposed well locations for Kerr McGee in the Red Rock/Lukachukai area of Arizona. The original survey on December 12, 1980 (NPS File No DCA-80-431) documented snow cover of greater than 10 percent and at the request of Dr. Terje Birkedal, five of the six were scheduled to be reexamined. The sixth was within the 10% limit. Plans to develop Navajo 83-5 have been dropped since the initial survey and this location was not resurveyed. All of the four other locations had snow cover levels of 10% or less on January 15, 1981. The results of the resurvey are described below.

- #27 Navajo - Cultural remains consists of 1 all-aluminum lemon soda can (initially recommended for clearance)
- #83-6 Navajo - No cultural remains (initially recommended for clearance)
- #25 Navajo - No cultural remains (initially recommended for clearance)
- #26 Navajo - One site DCA-81-22, a modern Navajo construction, was located 33m northeast of the well stake. The site was flagged for avoidance. (resurvey was initially advised)

DCA-81-22 consists of a small sweathouse-like structure with an entry oriented to 70° (MN). The structure has a maximum exterior basal diameter of 1.3m and stands only 60cm high. The structure is constructed of about 30 slanting limbs, probably deadfall, forming a cone. The entry is framed with poles and is about 25cm wide and 40cm high, with two short branches attached with baling wire to form a lintel.

Approximately 75cm to the north of the sweat house is a pile of scoted sandstone chunks and charcoal forming a mound about 1.5 in diameter and 30cm high.

One coffee can lid lies about 3m east of the structure.

The arrangement of the features parallels that of full-size sweathouse patterns but the conical structure is too small even for me, at 5'6", to sit upright in. I could have curled up in it, however, once I squeezed through the entrance. There would be no room to place hot rocks without scorching oneself.

The condition of the baling wire suggests that at the outside the structure is no more than twenty years old and is probably only about 5 years old.

According to Mr. Claude Hatch, Navajos sometimes build small features like that described above to shelter a dog during cold weather. The scorched rock and charcoal might be remnants of an horno although no indications of its form remain. If the site does consist of a doghouse and a cooking facility, it may be all that remains of a fall or spring campsite.

The small size of the structure, particularly its height and restricted floor area, together with Mr. Hatch's observation that rocks are usually left inside a sweat lodge and that the structure must be large enough to permit a person to sit or squat at least one or two feet from the hot rock pile, indicates that the feature did not function as a sweathouse despite the proximity of the rock pile.

The site was marked with white flagging tape so that it could be avoided during construction. If it is not possible to avoid the site, DCA recommends that prior to construction an ethnographer and informant visit the site to obtain a better functional assessment.

With these stipulations DCA recommends archaeological clearance for all four locations.

EXHIBIT "J"

REHABILITATION PLAN

Lease No.: 14-20-0603-8812; Well Name and No.: Navajo #88-6;
Location: 2000' FSL & 1690' FEL, Sec. 25, T. 36 N., R. 29

Kerr-McGee Corporation intends to drill a well on surface owned by Navajo (Tribal Lands) B.I.A.. The lessee/operator agree to complete the following rehabilitation work if the well is a producer:

- Yes No Maintain access road and provide adequate drainage to road.
 Yes No Reshape and reseed any area not needed for maintenance of the pump and support facilities.

Other requirements: _____

The following work will be completed when the well is abandoned:

- Yes No Pit will be fenced until dry, then filled to conform to surrounding topography.
 Yes No Water bars will be constructed as deemed necessary.
 Yes No Site will require reshaping to conform to surrounding topography.
 Yes No Entire disturbed area will be reseeded. If yes, the following seed mixture will be used:
B.I.A. Mixture
 Yes No Access road will be closed, rehabilitated and reseeded using the same seed mixture as above.
 Yes No Access road will remain for surface owner's use.
 Yes No Water bars will be constructed on the access road as deemed necessary.

Other requirements: _____

Surface Owner:

Name: B.I.A.
Address: _____
City: Window Rock
State: Arizona
Telephone: _____
Date: March 6, 1981

Operator/Lessee

Name: Kerr-McGee Corporation
Address: P. O. Box 250
City: Amarillo
State: Texas
Telephone: 806/359-0351
Date: March 6, 1981

I CERTIFY rehabilitation has been discussed with me, the surface owner:

N/A
(Surface owner's signature)

This plan covers rehabilitation requirements only and does not affect any other agreements between the lessee/operator and surface owner.

APPLICATION FOR PERMIT TO DRILL OR RE-ENTER

RECEIVED

APPLICATION TO DRILL

RE-ENTER OLD WELL

MAR 11 1981

O & G CONS. COMM.

Kerr-McGee Corporation
NAME OF COMPANY OR OPERATOR

P. O. Box 250
Address

Amarillo
City

TX 79189
State

Brinkerhoff Signal, Inc.
Drilling Contractor

3400 Anaconda Tower, Denver, CO 80202
Address

DESCRIPTION OF WELL AND LEASE

Federal, State or Indian Lease Number, or if fee lease, name of lessor	Well number	Elevation (ground)
14-20-0603-8812 Navajo Tract 88	6	8569 ungraded ground

Nearest distance from proposed location to property or lease line:	Distance from proposed location to nearest drilling, completed or applied—for well on the same lease:
1690 feet	1529 feet

Number of acres in lease:	Number of wells on lease, including this well, completed in or drilling to this reservoir:
2560	5

If lease, purchased with one or more wells drilled, from whom purchased:	Name	Address

Well location (give footage from section lines)	Section—township—range or block and survey	Dedication (Comply with Rule 105)
2000' FSL & 1690' FEL	Sec. 25, T36N, R29E	NW SE 1/4

Field and reservoir (if wildcat, so state)	County
Dineh-bi-Keyah	Apache

Distance, in miles, and direction from nearest town or post office
13.5 miles Southwest from Red Rock, Arizona

Proposed depth:	Rotary or cable tools	Approx. date work will start
4500'	Rotary	May 1, 1981

Bond Status: Blanket Bond	Organization Report	Filing Fee of \$25.00
Amount:	On file <input checked="" type="checkbox"/> Or attached	Attached Yes; Check No. 104615

Remarks:

CERTIFICATE: I, the undersigned, under the penalty of perjury, state that I am the Engineering Assistant of the Kerr-McGee Corporation (company), and that I am authorized by said company to make this report; and that this report was prepared under my supervision and direction and that the facts stated therein are true, correct and complete to the best of my knowledge.

Kelley Eisenberg
Signature

February 26, 1981
Date

Permit Number: 722
Approval Date: March 1, 1981
Approved By: [Signature]

Notice: Before sending in this form be sure that you have given all information requested. Much unnecessary correspondence will thus be avoided.

STATE OF ARIZONA
OIL & GAS CONSERVATION COMMISSION
Application to Drill or Re-enter
File Two Copies

Form No. 3

- Operator shall outline the dedicated acreage for both oil and gas wells on the plat.
- A registered professional engineer or land surveyor registered in the State of Arizona or approved by the Commission shall show on the plat the location of the well and certify this information in the space provided.
- All distances shown on the plat must be from the outer boundaries of the Section.
- Is the Operator the only owner in the dedicated acreage outlined on the plat below? YES NO
- If the answer to question four is "no," have the interests of all the owners been consolidated by communitization agreement or otherwise? YES NO If answer is "yes," Type of Consolidation _____
- If the answer to question four is "no," list all the owners and their respective interests below:

Owner	Land Description
	<p style="text-align: center;">CERTIFICATION</p> <p>I hereby certify that the information above is true and complete to the best of my knowledge and belief.</p> <p style="text-align: center;"><i>Kelley Eisenberg</i></p> <p>Name Kelley Eisenberg</p> <p>Position Engineering Assistant</p> <p>Company Kerr-McGee Corporation</p> <p>Date February 26, 1981</p> <p>I hereby certify that the well location shown on the plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.</p> <p>Date Surveyed December 5, 1980</p> <p>Registered Professional Engineer and/or Land Surveyor</p> <p>See attached surveyor plat</p> <p>Certificate No. 3950</p>

PROPOSED CASING PROGRAM

Size of Casing	Weight	Grade & Type	Top	Bottom	Cementing Depths	Sacks Cement
20"	94#/ft	H-40 ST&C	Surf.	100'	100'	12 yds. redmix
8 5/8"	24#/ft	K-55 ST&C	Surf.	400'	400'	300 sx.
5 1/2"	14#/ft	K-55 ST&C	Surf.	4500'	4500'	300 sx.

RECEIVED

MAR 11 1981

O & G CONS. COMM.


COMPANY KERR-McGEE CORPORATION

LEASE NAVAJO WELL NO. 88-6

SEC. 25, T. 36N, R. 29E
APACHE COUNTY, ARIZONA

LOCATION 2000'FSL 1690'FEL

ELEVATION 8569 ungraded ground

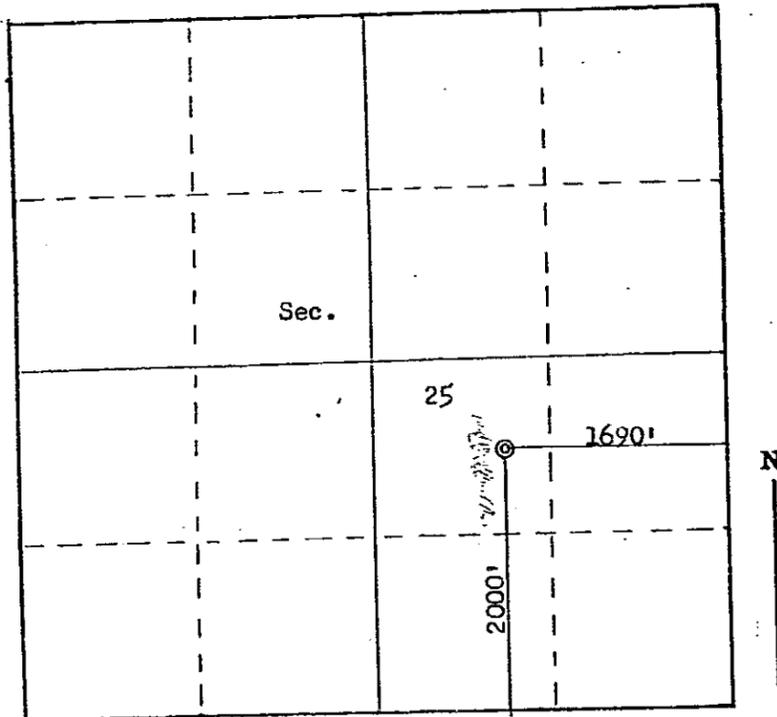

SCALE—4 INCHES EQUALS 1 MILE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTE OF ACTUAL SURVEYS MADE BY ME UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

Fred B. Kerr Jr.
Fred B. Kerr Jr.

SEAL:

#3950

Registered Land Surveyor.

SURVEYED December 5 1980

FARMINGTON, N. M.



PERMIT TO DRILL

This constitutes the permission and authority from the
OIL AND GAS CONSERVATION COMMISSION,
STATE OF ARIZONA,

To: KERR-McGEE CORPORATION
(OPERATOR)

to drill a well to be known as

NAVAJO 88-6

(WELL NAME)

located 2000' FROM SOUTH LINE & 1690' FROM EAST LINE (NW SE)

Section 25 Township 36 NORTH Range 29 EAST, APACHE County, Arizona.

The NW SE 1/4 of said

Section, Township and Range is dedicated to this well.

Said well is to be drilled substantially as outlined in the attached Application and must be drilled in full compliance with all applicable laws, statutes, rules and regulations of the State of Arizona.

Issued this 11th day of March, 1981.

OIL AND GAS CONSERVATION COMMISSION

By W.B. [Signature]
EXECUTIVE SECRETARY

PRIOR TO BEING ALLOWED TO PRODUCE THIS WELL YOU MUST BE IN FULL COMPLIANCE WITH RULE 105, SECTION A THRU G (S.P.C.O.G.), WITH REFERENCE TO THE PRODUCT TO BE PRODUCED.

PERMIT N^o 722

RECEIPT NO. 2013
API NO. 02-001-20252

State of Arizona
Oil & Gas Conservation Commission
Permit to Drill

FORM NO. 27

TEN FOOT SAMPLES ARE REQUIRED FROM SURFACE

DINEH-BI-KEYAH FIELD

Operator: Mountain States Petroleum Corporation

Bond Company: Indian lands, evidence of bond posted with BIA

Amount: \$325,000*

Bond No.: Letter of Credit Bond No. 315 **Date approved:** 5/27/94

* Pursuant to commission motion of October 31, 1997, no bond required with State of Arizona upon evidence of bond posted with the BIA.

Permits covered by this bond posted with the BIA:

<u>377</u>	<u>445</u>
<u>384</u>	<u>446</u>
<u>385</u>	<u>484</u>
<u>386</u>	<u>506</u>
<u>388</u>	<u>618</u>
<u>389</u>	<u>691</u>
<u>390</u>	<u>692</u>
<u>396</u>	<u>693</u>
<u>416</u>	<u>695</u>
<u>417</u>	<u>696</u>
<u>419</u>	<u>719</u>
<u>421</u>	<u>720</u>
<u>422</u>	<u>721</u>
<u>431</u>	<u>722</u>
<u>443</u>	<u>723</u>



Jane Dee Hull
Governor

State of Arizona
Arizona Geological Survey

416 W. Congress, Suite 100
Tucson, Arizona 85701
(520) 770-3500



Larry D. Fellows
Director and State Geologist

December 1, 1997

Ms. Stacey Roberts
Kerr-McGee Corporation
P.O. Box 25861
Oklahoma City, OK 73125

722

Re: Kerr-McGee Corporation
\$25,000 Oil Drilling Blanket Bond #2971100-2620
Safeco Insurance Company of America

Dear Ms. Roberts:

Mountain States Petroleum has provided evidence of its bonding with the BIA for the Dineh-bi-Keyah Field in Arizona, and our records show that Kerr-McGee Corporation has no outstanding drilling or plugging obligations in Arizona.

As a result, this letter constitutes written permission by the Oil and Gas Conservation Commission to terminate liability under the referenced bond. A copy of the bond is enclosed for your information.

Please advise if we may be of further service.

Sincerely,

Steven L. Rauzi
Oil & Gas Program Administrator

Enclosure

Operator KERR-McGEE CORPORATION

Bond Company SAFECO INSURANCE COMPANY OF AMERICA Amount \$25,000

Bond No. 2971100-2620 Date Approved FEBRUARY 18, 1994


CANCELLED
DATE _____

ACTIVE

Permits covered by this bond:

377	445
384	446
385	484
386	506
388	618
389	691
390	692
396	673
416	695
417	696
419	719
421	720
422	721
431	722
443	723

MONTHLY PRODUCTION AT 6 NAVAJO-88 (722), ARIZONA: SEP 1981 - DEC 1996
nw se 25-36n-29e, Dineh-bi-Keyah Field, Apache County

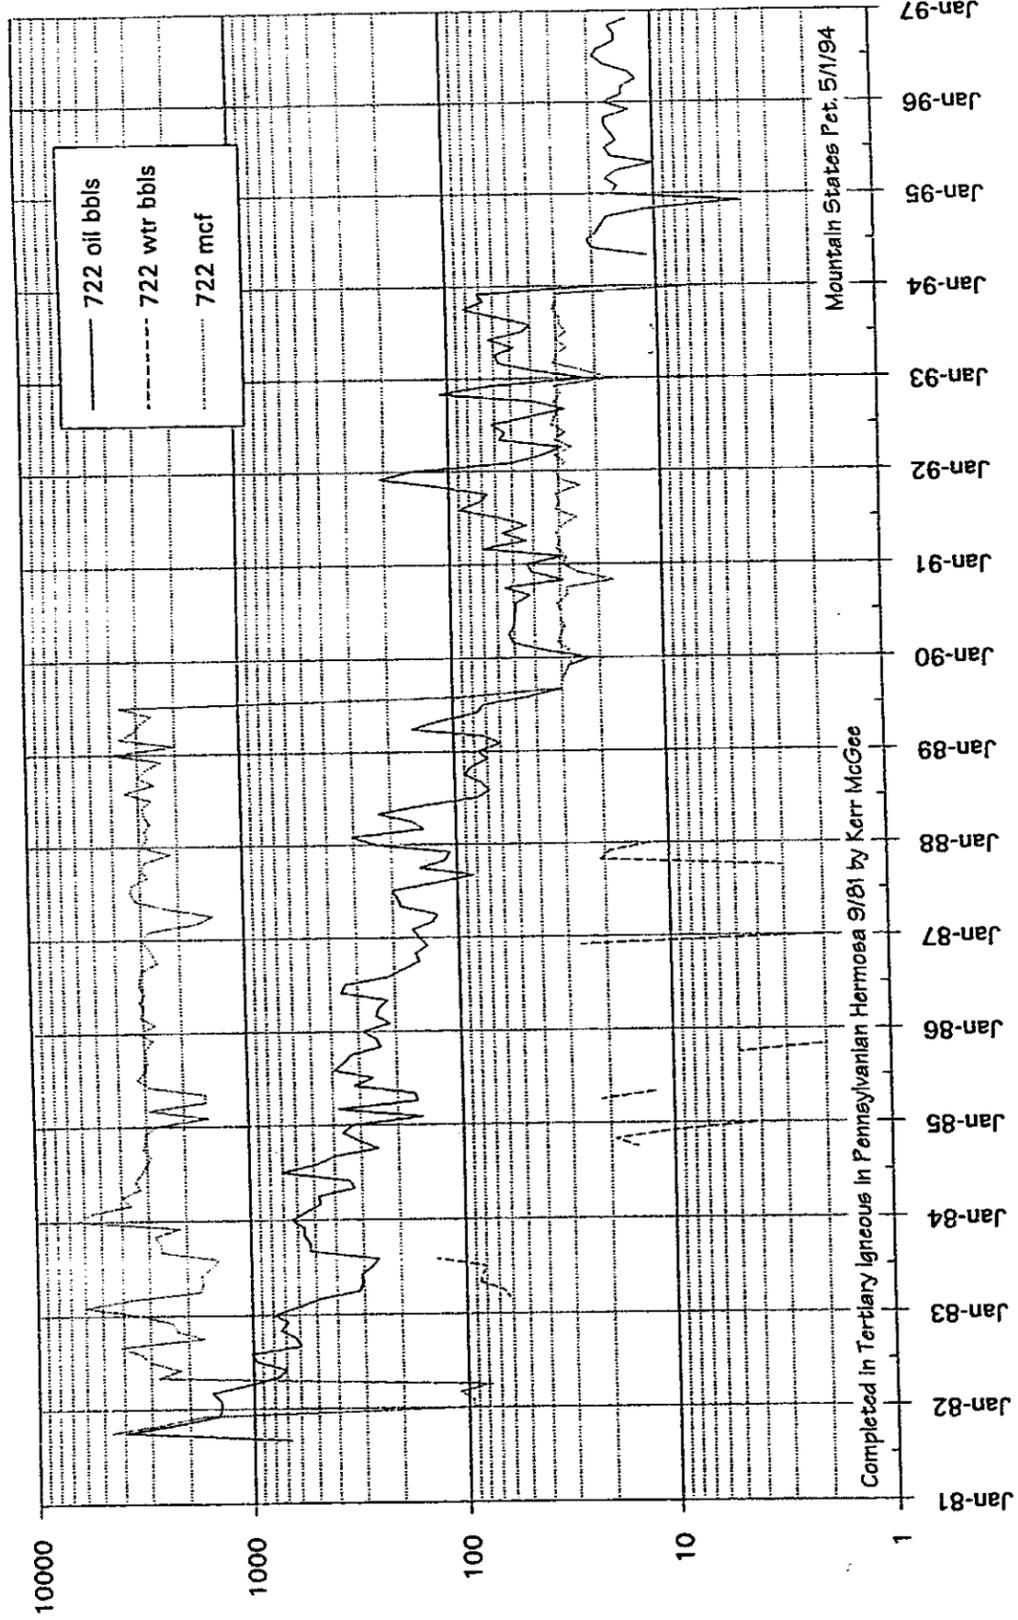



Fife Symington
Governor

State of Arizona
Arizona Geological Survey

845 North Park Avenue, #100
Tucson, Arizona 85719
(602) 882-4795



Larry D. Fellows
Director and State Geologist

June 8, 1994

Ms. Judy Burkhart
Mountain States Petroleum Corporation
P. O. Box 1936
Roswell, New Mexico 88201

Dear Ms. Burkhart:

This will acknowledge receipt of your letter of June 6, which included a change of operator form for each of the 31 Kerr-McGee Corporation wells at the Dineh-bi-Keyah Field sold to Mountain States Petroleum Corporation. Our records indicate that the Navajo #B-1 was plugged and abandoned by Kerr-McGee Corporation in October 1993.

Please note that our records indicate a different API number than the one you have recorded on your forms for the following wells:

<u>Well</u>	<u>API #</u>
Navajo 01	02-001-20001
Navajo 03X	02-001-20011
Navajo 04	02-001-20009
Navajo 10	02-001-20042
Navajo 14	02-001-20040
Navajo 15	02-001-20041

Sincerely,

Steven L. Rauzi
Oil & Gas Program Administrator

UNITED STATES DEPARTMENT OF THE INTERIOR
MINERALS MANAGEMENT SERVICE
ROYALTY MANAGEMENT PROGRAM

CHANGES TO REPORTER INFORMATION

OLD INFORMATION:
MMS OPERATOR CODE: X0217
COMPANY NAME: KERR MCGEE CORPORATION

NEW INFORMATION:
MMS OPERATOR CODE: X0274
COMPANY NAME: MOUNTAIN STATES PETROLEUM CORP
CONTACT NAME: RUBY WICKERSHAM
STREET ADDRESS: 213 E FOURTH
CITY: ROSWELL
STATE: NM ZIP CODE: 88201-
PHONE: 505 623-7184
AREA CODE

COMPLETE IF APPLICABLE:
 I AM NO LONGER AN OPERATOR OF INDIAN OR FEDERAL PROPERTIES.
PLEASE REMOVE MY NAME FROM YOUR MAILING LIST.

COMPANY SOLD TO: _____ EFFECTIVE DATE: _____

LEASES / AGREEMENTS AFFECTED: NAVAJO # 88-6 (722) **AZ OIL & GAS CONSERVATION COMMISSION**

Dineh Bi Keyah Field - Apache County, Arizona JUN 8 1994

Lease #: 14-20-0603- 8812 API #: 020012025200S1

COMMENTS: This property was sold to Mountain States Petroleum Corp.
and they became operator effective May 1, 1994.

SIGNATURE: Judy Burkheart
DATE: 5/13/94

MAIL TO:
MINERALS MANAGEMENT SERVICE
ROYALTY MANAGEMENT PROGRAM
P.O. BOX 25165 MS-3122
DENVER, CO 80225

P. O. BOX 1936

505 623-7184

MOUNTAIN STATES PETROLEUM CORPORATION

213 EAST FOURTH STREET
ROSWELL, NEW MEXICO
88202

June 6, 1994

Arizona Geological Survey
845 North Park Avenue, #100
Tucson, Arizona, 85719

**AZ OIL & GAS
CONSERVATION COMMISSION**

JUN 8 1994

Attention: Steven L. Rauzi,
Oil & Gas Program Administrator

Re: Dineh-bi-Keyah Field
Apache County, Arizona

Dear Sir;

In followup of our May 24, 1994, letter to you relative to the change of operator from Kerr McGee to Mountain States Petroleum Corporation for the captioned field; please find enclosed a copy of the notices sent to the Minerals Management Service.

We hope this will supply the information you requested and apologize for any inconvenience we may have caused. If you have any questions or are in need of anything further please contact the undersigned. Thank you.

Sincerely,

Judy Burkhart
Judy Burkhart,
Secretary

Enclosures

P. O. BOX 1936

505 623-7184

MOUNTAIN STATES PETROLEUM CORPORATION

213 EAST FOURTH STREET
ROSWELL, NEW MEXICO
88202

May 24, 1994

Arizona Geological Survey
845 North Park Avenue, #100
Tucson, Arizona 85719

Attention: Steven L. Rauzi,
Oil & Gas Program Administrator

Re: Dineh-bi-Keyah Field
Apache County, Arizona

Dear Sir;

Please be advised that effective May 1, 1994, Mountain States Petroleum Corporation replaced Kerr-McGee as Operator of the captioned field and it's respective wells.

Listed on the attached sheet are the well names and API #'s of each well in this field, including shut-in, producing, and abandoned wells.

Please change your records to reflect that Mountain States Petroleum Corporation, Post Office Box 1936, Roswell, New Mexico, 88202-1936, (505) 623-7184, is now the operator of these properties and as such will be filing all required monthly production reports.

If you have any questions or are in need of anything further in this matter please contact the undersigned. Thank you.

Sincerely,

Judy Burkhart

Judy Burkhart,
Secretary

Attachment

CONSERVATION COMMISSION

MAY 31 1994

Picture
Kera-McGee
88-6 Nov.

PH 722



[Faint, illegible handwritten text]



KERR-McGEE CORPORATION

4221 WEST TWENTY-FIRST AVENUE
P. O. BOX 250 • AMARILLO, TEXAS 79189

RECEIVED

OCT 20 1981

O & G CONS. COMM.

PHONE
806 359-0351

OIL AND GAS DIVISION

October 14, 1981

Oil and Gas Conservation Commission
State of Arizona
1645 West Jefferson, Suite 420
Phoenix, Arizona 85007

RE: Completion of Kerr-McGee Corporation's
Navajo #88 Lease Well No. 6, Dineh-Bi-
Keyah Field, Apache County, Arizona

Gentlemen:

Enclosed please find three (3) copies of Form No. 6, Potential Test and Request for Allowable-Oil Wells, with attached lease plats; and Form No. 4, "Well Completion or Recompletion Report..." for the subject well. No logs are enclosed. The logs were filed directly by the logging company. Please return the extra copy of each enclosure to this office in the enclosed envelope.

If you need any further information, please contact me at 806/359-0351.

Sincerely,

KERR-McGEE CORPORATION

Kelley Eisenberg
Kelley Eisenberg
Sr. Engineering Assistant

KE/pjs
encl.

cc: The Navajo Tribe

WA



KERR-McGEE CORPORATION

4221 WEST TWENTY-FIRST AVENUE
P. O. BOX 250 • AMARILLO, TEXAS 79109

RECEIVED

MAY 20 1981

O & G CONS. COMM.

OIL AND GAS DIVISION

May 18, 1981

PHONE
806 359-0351

Oil and Gas Conservation Commission
State of Arizona
1645 West Jefferson, Suite 420
Phoenix, Arizona 85007

Attention: W. E. Allen

RE: Extensions on Permits to Drill Kerr-
McGee's Navajo #25, #26, #27, #88-6, and
#138-3, Apache County, Arizona

Gentlemen:

Kerr-McGee Corporation respectfully requests extensions on the Permits to Drill
for the above referenced wells. An extension of six (6) months should be enough
time to enable all five (5) wells to be drilled.

If you need any further information, please contact me at 806/359-0351.

Sincerely,

KERR-McGEE CORPORATION

Kelley Eisenberg

Kelley Eisenberg
Sr. Engineering Assistant
Southwest District - N. A.

KE/sm

APPROVED

OIL & GAS CONSERVATION COMMISSION
STATE OF ARIZONA

By W. E. Allen
Date 5-20-81

719
720
721
722 ✓
723

May 13, 1981

Kerr-McGee Corporation
P.O. Box 250
Amarillo, Texas 79189

Attention: Kelley Eisenberg

Re: Kerr-McGee Navajo 25
NE NW 31-36N-30E, Apache County
State Permit 719

Gentlemen:

This is to advise that the above referenced permit to drill will expire on May 26, 1981. Should you wish an extension of this permit, please advise before expiration.

Incidentally, you have been issued four other permits, numbers 720, 721, 722, and 723. These permits will expire on June 11, 1981. We would suggest you request an extension at this time on all five of the proposed wells.

Yours very truly,

W. E. Allen
Executive Secretary

WEA:os

722

March 11, 1981

Kerr-McGee Corporation
P.O. Box 250
Amarillo, Texas 79189

Attention: Kelley Eisenberg
Engineering Assistant

Gentlemen:

Enclosed are approved application to drill, permit to drill,
and receipt for the following:

Permit 720, Kerr-McGee Navajo 26
Permit 721, Kerr-McGee Navajo 27
✓ Permit 722, Kerr-McGee Navajo 88-6
Permit 723, Kerr-McGee Navajo 138-3

Yours truly,

W. E. Allen
Executive Secretary

os
Enc.



KERR-McGEE CORPORATION

4221 WEST TWENTY-FIRST AVENUE
P. O. BOX 250 • AMARILLO, TEXAS 79189

RECEIVED

MAR 11 1981

O & G CONS. COMM.

OIL AND GAS DIVISION

PHONE
806 359-0351

February 26, 1981

State of Arizona
Oil & Gas Conservation Commission
1645 W. Jefferson Suite 420
Phoenix, AZ 85007

Re: Kerr-McGee Corporation's Application
for a Permit to Drill the Navajo Lease,
Well No. 88-6 , Dineh-bi-Keyah Field,
Apache County, Arizona

Gentlemen:

Enclosed please find in duplicate, Form No. 3, Application for a Permit to Drill, and two (2) copies of the surveyors plat for the above referenced well. Also enclosed is a check for twenty-five dollars (\$25.00) to cover the filing fee for the well.

If you need any further information, please contact me at 806-359-0351.

Sincerely,

KERR-McGEE CORPORATION

Kelley Eisenberg

Kelley Eisenberg
Engineering Assistant
Southwest District - N.A.

KE/cw
Enc.

722